

Allied Export

Please find below a selection of our fast moving products, for full product list and further information please get in touch with us on +44 (0)1925 232662 or email us at mail@alliedexport.co.uk

LED BATTEN FITTINGS



The LED Batten fittings are suitable for the replacement of a fluorescent fitting or for an economical LED lighting solution for corridors and large spaces.

Applications:

- Commercial Sites • Educational Providers • Retail



Image shown BF420W-1

Specification

| | |
|-----------------------------|---|
| LED: | 48-288pcs of SMD 2835 |
| Material: | Powder coated metal body and polycarbonate diffuser |
| Colour Temperature: | 4100K |
| Guarantee: | 5 Years |
| Life Expectancy: | 50,000 Hours |
| Working Temperature: | -15°C - 45°C |
| Beam Angle: | 120° |
| CRI: | >80 Ra |

Additional Information

- For emergency versions see next page.
- IK03 - Polycarbonate diffuser.
- IK07 - Metal body.
- White base and opal diffuser.
- Microwave (Internal) Sensor (WFLEDMS) is only suitable for twin versions.

Dimensions



| Code | Description | Single / Twin | Lumen Output | Power Factor | Dimensions (L x W x D mm) |
|----------|---------------------------------|---------------|--------------|--------------|---------------------------|
| BF210W-1 | 10W | Single | 1000lm | 0.5 | 620 x 69 x 82 |
| BF420W-1 | 19W | Single | 1900lm | 0.5 | 1230 x 69 x 82 |
| BF530W-1 | 24W | Single | 2500lm | 0.95 | 1530 x 69 x 82 |
| BF630W-1 | 28W | Single | 3000lm | 0.95 | 1795 x 69 x 82 |
| BF440W-1 | 37W | Twin | 3700lm | 0.5 | 1230 x 109 x 82 |
| BF550W-1 | 46W | Twin | 4900lm | 0.95 | 1530 x 109 x 82 |
| BF660W-1 | 56W | Twin | 6000lm | 0.95 | 1795 x 109 x 82 |
| MSLEEXT | LED (External) Microwave Sensor | Single | - | - | 95 x 46 x 26 |
| WFLEDMS | Microwave (Internal) Sensor | Twin | - | - | 115 x 37 x 25 |

LED EMERGENCY TWIN BATTEN FITTINGS



The LED Batten fittings are suitable for the replacement of a fluorescent fitting or for an economical LED lighting solution for corridors and large spaces.

Applications:

• Commercial Sites • Educational Providers • Retail



Image shown BF440WE-1


Specification

| | |
|-----------------------------|---|
| LED: | 192-288pcs of SMD 2835 |
| Material: | Powder coated metal body and polycarbonate diffuser |
| Colour Temperature: | 4100K |
| Guarantee: | 5 Years |
| Life Expectancy: | 50,000 Hours |
| Working Temperature: | 0°C - 45°C |
| Power Factor: | 0.95 |
| Beam Angle: | 120° |
| CRI: | >80 Ra |

Additional Information

- Standard versions available on previous page.
- IK03 - Polycarbonate diffuser.
- IK07 - Metal body.
- White base and opal diffuser.

Dimensions

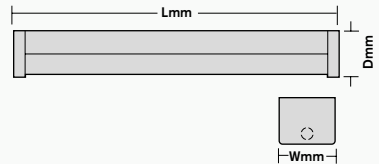

| Code | Description | Lumen Output | Dimensions (L x W x D mm) |
|-----------|---------------------------------|---------------------------|---------------------------|
| BF440WE-1 | 39W | 3900lm / 390lm in EM mode | 1230 x 109 x 82 |
| BF550WE-1 | 48W | 4900lm / 392lm in EM mode | 1530 x 109 x 82 |
| BF660WE-1 | 58W | 6000lm / 399lm in EM mode | 1795 x 109 x 82 |
| MSLEEXT | LED (External) Microwave Sensor | - | 95 x 46 x 26 |
| WFLEDMS | Microwave (Internal) Sensor | - | 115 x 37 x 25 |

LED 26W ULTRA EFFICIENT PANELS

The ultra-efficient LED 26W Panel offers 115lm/w performance and provides significant energy saving and rapid payback on investment.

Applications:

• Commercial sites • Educational providers • Offices



Image shown LEDP26-40


Specification

| | |
|-----------------------------|------------------|
| LED: | 200pcs of 4014 |
| Material: | Aluminium / PMMA |
| Lumen Output: | 3000lm |
| Guarantee: | 5 Years |
| Life Expectancy: | 50,000 Hours |
| Working Temperature: | -10°C - 50°C |
| Power Factor: | >0.9 |
| Beam Angle: | 120° |
| CRI: | 80 Ra |

Additional Information

- Dimmable driver (LEDDRIVER36D) available.
- Emergency conversion kit (EMLEDKIT2 / EMLEDKIT3) available.
- EMLEDKIT2 - 230lm in emergency mode.
- EMLEDKIT3 - 346lm in emergency mode.
- Flicker free driver included.
- Recessed Mounting Bracket (LEDP-RMKW) available.
- Surface Mounting Kit (LEDP-SMKW) available.
- White finish.

Dimensions

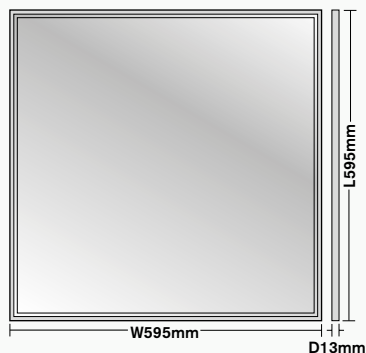

| Code | Colour Temperature | Dimensions (L x W x D mm) |
|-----------|--------------------|---------------------------|
| LEDP26-40 | 4000K | 595 x 595 x 13 |
| LEDP26-60 | 6000K | 595 x 595 x 13 |

LED 26W PANELS



The flicker free, non-dimmable LED 26W Panel (595 x 295mm) with a white frame finish.

Applications:

• Educational providers • Leisure Centres • Hospitality



Image shown LEDP6030-40


Specification

| | |
|-----------------------------|--------------------|
| LED: | 144pcs of 4014 LED |
| Material: | Aluminium |
| Lumen Output: | 2340lm |
| Guarantee: | 3 Years |
| Life Expectancy: | 30,000 Hours |
| Working Temperature: | -10°C - 50°C |
| Power Factor: | >0.9 |
| Beam Angle: | 80° |
| CRI: | 80 Ra |

Additional Information

- Dimmable driver (LEDDRIVER36D) available.
- Emergency conversion kit (EMLEDKIT2 / EMLEDKIT3) available.
- EMLEDKIT2 - 180lm in emergency mode.
- EMLEDKIT3 - 270lm in emergency mode.
- Flicker free driver included.
- White finish.

Dimensions



| Code | Colour Temperature | Dimensions (L x W x D mm) |
|-------------|--------------------|---------------------------|
| LEDP6030-40 | 4000K | 295 x 595 x 13 |
| LEDP6030-60 | 6000K | 295 x 595 x 13 |

GARRISON LED 36W PANELS

The new Garrison LED 36W Panels come with a flicker free driver and have a white finish.

Applications:

• Educational Providers • Leisure Centres • Hospitality

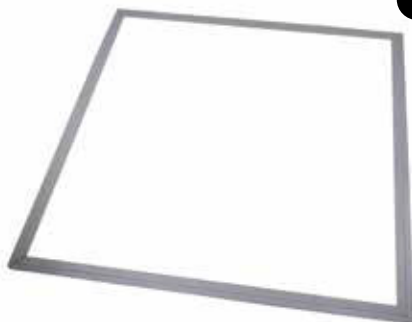


Image shown GLP6636-40


Specification

| | |
|-----------------------------|--------------------------------------|
| LED | 156pcs of 4014 |
| Material: | Aluminium and polycarbonate diffuser |
| Lumen Output: | 2880lm |
| Guarantee: | 2 Years |
| Life Expectancy: | 20,000 Hours |
| Working Temperature: | -10°C - 50°C |
| Power Factor: | 0.9 |
| Beam Angle: | 120° |
| CRI: | >80 Ra |

Additional Information

- 80lm/W.
- Dimmable driver (LEDDRIVER36D) available.
- Emergency conversion (EMLEDKIT2 / EMLEDKIT3) available.
- EMLEDKIT2 - 160lm in emergency mode.
- EMLEDKIT3 - 240lm in emergency mode.
- Flicker free driver included.
- Recessed Mounting Kit (LEDP-RMKW) available.
- White RAL9003 finish.

Dimensions

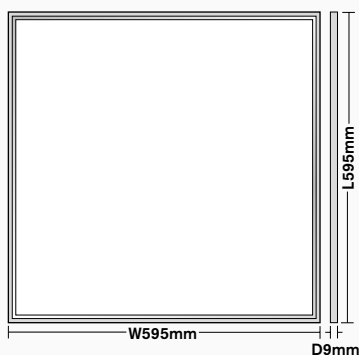

| Code | Colour Temperature | Dimensions (L x W x D mm) |
|------------|--------------------|---------------------------|
| GLP6636-40 | 4000K | 595 x 595 x 9 |
| GLP6636-60 | 6000K | 595 x 595 x 9 |

LED 45W PANELS

The LED 45W Panel is flicker free, non-dimmable and suitable for office and meeting room applications.

Applications:

- Education Providers • Meeting Rooms • Offices



Image shown LEDPE45-40


Specification

| | |
|-----------------------------|--|
| LED: | SMD LED / 4014 LED |
| Material: | Aluminium PMMA and polycarbonate / Aluminium and polycarbonate |
| Lumen Output: | 3600lm |
| Guarantee: | 2 years |
| Life Expectancy: | 20,000 Hours |
| Working Temperature: | -25°C - 50°C |
| Power Factor: | >0.9 |
| Beam Angle: | 120° / 110° |
| CRI: | >80 Ra |

Additional Information

- Dimmable driver (LEDDRIVER36D) available.
- Emergency conversion (EMLEDKIT2 / EMLEDKIT3) available.
- EMLEDKIT2 - 160lm in emergency mode.
- EMLEDKIT3 - 240lm in emergency mode.
- Recessed Mounting Kit (LEDP-RMKW) for the LEDPE45 range available.
- Surface Mounting Kits (LEDP-SMKW / LEDP-SMKW1230) available.

Dimensions



| Code | Description | Colour Temperature | Dimensions (L x W x D mm) |
|---------------|----------------|--------------------|---------------------------|
| LEDPE45-40 | 45W | 4000K | 595 x 595 x 14 |
| LEDPE45-60 | 45W | 6000K | 595 x 595 x 14 |
| LEDPE12030-40 | 45W | 4000K | 1195 x 295 x 13 |
| LEDPE12030-60 | 45W | 6000K | 1195 x 295 x 13 |
| LEDP45-DRIVER | 45W LED Driver | - | 140 x 45 x 29 |

BASTION LED 60W PANELS

The Bastion LED 60W Panels include a flicker free driver and have a white finish.

Applications:

• Educational Providers • Leisure Centres • Hospitality



Image shown BLP12660-40


Specification

| | |
|-----------------------------|--------------------------------------|
| LED: | 300pcs of 4014 |
| Material: | Aluminium and polycarbonate diffuser |
| Lumen Output: | 5200lm |
| Guarantee: | 5 Years |
| Life Expectancy: | 50,000 Hours |
| Working Temperature: | -10°C - 50°C |
| Power Factor: | 0.9 |
| Beam Angle: | 120° |
| CRI: | >80 Ra |

Additional Information

- 90lm/W.
- Dimmable driver (LEDDRIVER100D) available.
- Emergency conversion (EMLEDKIT2 / EMLEDKIT3) available.
- EMLEDKIT2 - 173lm in emergency mode.
- EMLEDKIT3 - 260lm in emergency mode.
- Flicker free driver included.
- Surface Mounting Kit (LEDP-SMKW12) available.
- White RAL9003 finish.

Dimensions

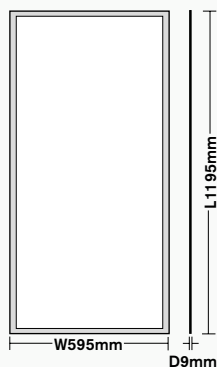

| Code | Colour Temperature | Dimensions (L x W x D mm) |
|-------------|--------------------|---------------------------|
| BLP12660-40 | 4000K | 1195 x 595 x 9 |
| BLP12660-60 | 6000K | 1195 x 595 x 9 |

RECESSED MOUNTING KIT FOR LED PANELS



The Recessed Mounting Kit is designed to fit the 595 x 595mm Panels. These kits enable the installation of panels into solid / MF ceilings.

Applications:

• Educational Providers • Leisure Centres • Hospitality



Specification


Material: Aluminium

Guarantee: 1 Year

Additional Information

• White finish

Dimensions



| Code | Colour | Dimensions (L x W x D mm) |
|-----------|--------|---------------------------|
| LEDP-RMKW | White | 600 x 600 x 40 |

SURFACE MOUNTING KITS FOR LED PANELS

The Surface Mounting Kits are designed to fit the 36W and 70W LED Panels.

Applications:

- Commercial sites • Educational providers • Offices



Image shown LEDP-SMKW

Specification


Material: Aluminium

Guarantee: 1 Year

Additional Information

- White RAL9010 finish.

Dimensions



| Code | Colour | Dimensions (L x W x D mm) |
|---------------|--------|---------------------------|
| LEDP-SMKW | White | 600 x 600 x 50 |
| LEDP-SMKW12 | White | 1200 x 600 x 50 |
| LEDP-SMKW1230 | White | 1200 x 300 x 50 |

LED CIRCULAR PANELS



The LED Circular Panels are suitable for educational providers and residential areas, are supplied with fixed output as standard and dimmable drivers are available to order separately if required.

Applications:

• Educational providers • Residential • Retail



Image shown SP20W-40


Specification

| | |
|-----------------------------|-----------------------------|
| LED: | 30-100pcs of SMD 2835 |
| Material: | Aluminium and polycarbonate |
| Guarantee: | 3 Years |
| Life Expectancy: | 30,000 Hours |
| Working Temperature: | -20°C - 45°C |
| Power Factor: | >0.9 |
| Beam Angle: | 120° |
| CRI: | 80 Ra |

Additional Information

- Emergency conversion (EMLEDKIT2) available.
- EMLEDKIT2 - 156-160lm in emergency mode.
- EMLEDKIT3 - 235-240lm in emergency mode.
- Phase cut dimming drivers available to order separately:SPS-DR6, SPS-DR12, SPS-DR15, SPS-DR18, SPS-DR20
- White finish.

Dimensions



| Code | Wattage | Colour Temperature | Lumen Output | Dimensions (Ø x D mm) | Cut out (Ø) |
|----------|---------|--------------------|--------------|-----------------------|-------------|
| SP6W-30 | 6W | 3000K | 470lm | 120 x 13 | 105 |
| SP6W-40 | 6W | 4000K | 470lm | 120 x 13 | 105 |
| SP6W-60 | 6W | 6000K | 470lm | 120 x 13 | 105 |
| SP12W-30 | 12W | 3000K | 930lm | 170 x 13 | 155 |
| SP12W-40 | 12W | 4000K | 930lm | 170 x 13 | 155 |
| SP12W-60 | 12W | 6000K | 930lm | 170 x 13 | 155 |
| SP15W-30 | 15W | 3000K | 1170lm | 190 x 13 | 180 |
| SP15W-40 | 15W | 4000K | 1170lm | 190 x 13 | 180 |
| SP15W-60 | 15W | 6000K | 1170lm | 190 x 13 | 180 |
| SP18W-30 | 18W | 3000K | 1450lm | 225 x 13 | 210 |
| SP18W-40 | 18W | 4000K | 1450lm | 225 x 13 | 210 |
| SP18W-60 | 18W | 6000K | 1450lm | 225 x 13 | 210 |
| SP20W-30 | 20W | 3000K | 1600lm | 240 x 13 | 225 |
| SP20W-40 | 20W | 4000K | 1600lm | 240 x 13 | 225 |
| SP20W-60 | 20W | 6000K | 1600lm | 240 x 13 | 225 |

LED CIRCULAR SURFACE MOUNT PANELS



The new LED Circular Surface Mount Panels include metal clips and a mounting bracket.

Applications:

• Educational Providers • Leisure Centres • Hospitality



Image shown SPC15W-40


Specification

| | |
|-----------------------------|-----------------------------|
| LED: | 75/100pcs of SMD 2835 |
| Material: | Aluminium and polycarbonate |
| Guarantee: | 3 Years |
| Life Expectancy: | 30,000 Hours |
| Working Temperature: | -20°C - 45°C |
| Power Factor: | 0.9 |
| Beam Angle: | 120° |
| CRI: | 80 Ra |

Additional Information

- 22cm 0.75mm GB/T5023.5 Cable included.
- 80lm/W
- Metal clips included.
- Mounting bracket included.
- RAL9003 White finish

Dimensions



| Code | Wattage | Colour Temperature | Lumen Output | Dimensions (Ø x D mm) |
|-----------|---------|--------------------|--------------|-----------------------|
| SPC15W-40 | 15W | 4000K | 1200lm | 200 x 40 |
| SPC15W-60 | 15W | 6000K | 1200lm | 200 x 40 |
| SPC20W-40 | 20W | 4000K | 1600lm | 240 x 40 |
| SPC20W-60 | 20W | 6000K | 1600lm | 240 x 40 |

LED SQUARE SURFACE MOUNT PANELS

The LED Square Panels are suitable for surface mounting and have a white finish.

Applications:

• Educational Providers • Leisure Centres • Hospitality



Image shown S20W-40


Specification

| | |
|-----------------------------|-----------------------------|
| LED: | 75pcs / 100pcs of 2835 SMD |
| Material: | Aluminium and polycarbonate |
| Guarantee: | 3 Years |
| Life Expectancy: | 30,000 Hours |
| Working Temperature: | -20°C - 45°C |
| Power Factor: | >0.9 |
| Beam Angle: | 120° |
| CRI: | >80 Ra |

Additional Information

- Phase cut dimming drivers available to order separately: SPS-DR15 & SPS-DR20.

Dimensions



| Code | Wattage | Colour Temperature | Lumen Output | Dimensions (L x W x D mm) |
|---------|---------|--------------------|--------------|---------------------------|
| S15W-40 | 15W | 4000K | 1200lm | 220 x 220 x 40 |
| S15W-60 | 15W | 6000K | 1200lm | 220 x 220 x 40 |
| S20W-40 | 20W | 4000K | 1600lm | 240 x 240 x 40 |
| S20W-60 | 20W | 6000K | 1600lm | 240 x 240 x 40 |

FORTRESS LED NON-CORROSIVE FITTINGS



The new waterproof LED Non-Corrosive, with a Tridonic driver, streamlined body, quick terminal connector and multiple entry options.

Applications:

- Commercial Kitchens • Commercial Sites • Factories



powered by
TRIDONIC

Image shown NCFT460




Specification

| | |
|-----------------------------|----------------------------------|
| LED: | 132-384pcs of 0.2W 2835 LED |
| Material: | ABS and polycarbonate |
| Colour Temperature: | 4000K |
| Guarantee: | 5 Years |
| Life Expectancy: | 50,000 Hours |
| Working Temperature: | -10°C - 40°C / 0°C - 40°C for EM |
| Power Factor: | 0.9 |
| Beam Angle: | 120° |
| CRI: | 80 Ra |

Additional Information

- 4/8/10/12 Diffuser clips included. 90lm/W. Microwave Sensors (WFLEDMS / MSLEDEXT) available. Grey finish. Ni-Cd Battery included with emergency versions. Mounting bracket included. Opal diffuser. Painted metal LED tray included. Screws included. Tridonic driver included.

Dimensions

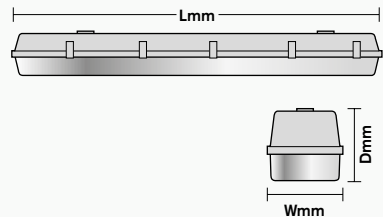

| Code | Wattage | Emergency | Lumen Output | Dimensions (L x W x D mm) |
|----------|---------|-----------|---------------------------|---------------------------|
| NCFT224 | 24W | No | 2160lm | 655 x 105 x 110 |
| NCFT224E | 24W | Yes | 2160lm (180lm in EM mode) | 655 x 105 x 110 |
| NCFT425 | 25W | No | 2250lm | 1265 x 105 x 110 |
| NCFT425E | 25W | Yes | 2250lm (180lm in EM mode) | 1265 x 105 x 110 |
| NCFT450 | 50W | No | 4500lm | 1265 x 105 x 110 |
| NCFT450E | 50W | Yes | 4500lm (360lm in EM mode) | 1265 x 105 x 110 |
| NCFT535 | 35W | No | 3150lm | 1565 x 105 x 110 |
| NCFT535E | 35W | Yes | 3150lm (270lm in EM mode) | 1565 x 105 x 110 |
| NCFT570 | 70W | No | 6300lm | 1565 x 105 x 110 |
| NCFT570E | 70W | Yes | 6300lm (450lm in EM mode) | 1565 x 105 x 110 |
| NCFT640 | 40W | No | 3600lm | 1860 x 105 x 110 |
| NCFT640E | 40W | Yes | 3600lm (270lm in EM mode) | 1860 x 105 x 110 |
| NCFT680 | 80W | No | 7200lm | 1860 x 105 x 110 |
| NCFT680E | 80W | Yes | 7200lm (450lm in EM mode) | 1860 x 105 x 110 |

BASTION LED NON-CORROSIVE FITTINGS



The new waterproof LED Non-Corrosive range, with a streamlined body, quick terminal connector and multiple entry options.

Applications:

- Commercial Kitchens • Commercial Sites • Factories



Image shown NCF535


Specification

| | |
|-----------------------------|----------------------------------|
| LED: | 72-192pcs of 0.2W 2835 |
| Material: | ABS and polycarbonate |
| Colour Temperature: | 4000K |
| Guarantee: | 3 Years |
| Life Expectancy: | 30,000 Hours |
| Working Temperature: | -10°C - 40°C / 0°C - 40°C for EM |
| Power Factor: | 0.5 / 0.9 |
| Beam Angle: | 120° |
| CRI: | 80 Ra |

Additional Information

- 6/10/12 Diffuser clips included. 90lm/W. Grey finish.
- Microwave Sensor (WFLEDMS / MSLEDEXT) available.
- Mounting bracket included. Ni-Cd Battery included with emergency versions. Opal diffuser. Painted Metal LED tray included. Screws included.

Dimensions

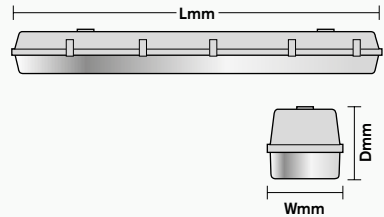

| Code | Wattage | Emergency | Lumen Output | Dimenisons (L x W x D mm) |
|---------|---------|-----------|---------------------------|---------------------------|
| NCF212 | 12W | No | 1080lm | 600 x 95 x 75 |
| NCF212E | 12W | Yes | 1080lm (90lm in EM mode) | 600 x 95 x 75 |
| NCF224 | 24W | No | 2160lm | 600 x 95 x 75 |
| NCF224E | 24W | Yes | 2160lm (180lm in EM mode) | 600 x 95 x 75 |
| NCF425 | 25W | No | 2250lm | 1200 x 95 x 75 |
| NCF425E | 25W | Yes | 2250lm (180lm in EM mode) | 1200 x 95 x 75 |
| NCF450 | 50W | No | 4500lm | 1200 x 95 x 75 |
| NCF450E | 50W | Yes | 4500lm (360lm in EM mode) | 1200 x 95 x 75 |
| NCF535 | 35W | No | 3150lm | 1500 x 95 x 75 |
| NCF535E | 35W | Yes | 3150lm (270lm in EM mode) | 1500 x 95 x 75 |
| NCF570 | 70W | No | 6300lm | 1500 x 95 x 75 |
| NCF570E | 70W | Yes | 6300lm (450lm in EM mode) | 1500 x 95 x 75 |

GARRISON WIRED FOR LED TUBES NON-CORROSIVE FITTINGS



The new empty body waterproof non-corrosive fittings, with a quick terminal connector, streamlined body and multiple entry points.

Applications:

- Commercial Kitchens • Commercial Sites • Factories



Image shown NCFB52

Specification

Material: ABS and polycarbonate

Guarantee: 3 Years


Life Expectancy: 30,000 Hours

Working Temperature: -10°C - 40°C

Additional Information

- 6/10/12 Diffuser clips included.
- Clear diffuser.
- Microwave Sensor (MSLEEXT) available.
- Mounting bracket included.
- Grey finish.
- Screws included.

Dimensions

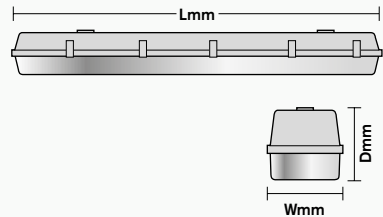

| Code | Single or Twin | Dimensions (L x W x D mm) |
|--------|----------------|---------------------------|
| NCFB21 | Single | 660 x 69 x 78 |
| NCFB22 | Twin | 660 x 99 x 78 |
| NCFB41 | Single | 1260 x 69 x 78 |
| NCFB42 | Twin | 1260 x 99 x 78 |
| NCFB51 | Single | 1560 x 69 x 78 |
| NCFB52 | Twin | 1560 x 99 x 78 |
| NCFB61 | Single | 1860 x 105 x 110 |
| NCFB62 | Twin | 1860 x 165 x 110 |

LED T8 TUBES



The range of highly efficient and economical T8 LED Tubes are suitable for domestic, retail and warehouse applications.

Applications:

- Commercial Kitchens • Commercial Sites • Factories

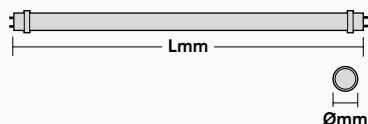


Image shown T8LED626-40

Specification

| | |
|-----------------------------|---|
| LED: | 54-144pcs 2835 |
| Material: | Polycarbonate tube and internal aluminium heat sink |
| Guarantee: | 3 Years |
| Life Expectancy: | 25,000 Hours |
| Working Temperature: | -20 - 40°C |
| Power Factor: | >0.9 |
| Beam Angle: | 180° (T8LED626 150°) |
| CRI: | 80 Ra |

Dimensions



Additional Information

- Box quantity of 25pcs.
- CE approved.
- G13 Cap.
- LED Fuse to be ordered separately if required (magnetic ballasts).
- Non-dimming.
- Opal diffuser.
- Supplied individually packed in cardboard sleeves.
- Wired live and neutral to one end.

| Code | Description | Colour Temperature | Lumen Output | Emergency Solution Module/Battery | Dimensions (L x Ø mm) |
|-------------|-------------|--------------------|---------------------------|-----------------------------------|-----------------------|
| T8LED210-40 | 10W | 4000K | 900lm / 270lm in EM mode | EMLEDOL90/ BP4C | 600 x 27 |
| T8LED210-60 | 10W | 6000K | 1000lm / 300lm in EM mode | EMLEDOL90/ BP4C | 600 x 27 |
| T8LED418-40 | 18W | 4000K | 1700lm / 283lm in EM mode | EMLEDOL90/ BP4C | 1200 x 27 |
| T8LED418-60 | 18W | 6000K | 1800lm / 300lm in EM mode | EMLEDOL90/ BP4C | 1200 x 27 |
| T8LED522-40 | 22W | 4000K | 2100lm / 286lm in EM mode | EMLEDOL90/ BP4C | 1500 x 27 |
| T8LED522-60 | 22W | 6000K | 2200lm / 300lm in EM mode | EMLEDOL90/ BP4C | 1500 x 27 |
| T8LED626-40 | 26W | 4000K | 2400lm / 276lm in EM mode | EMLEDOL/ BP3C | 1800 x 27 |
| T8LED626-60 | 26W | 6000K | 2500lm / 288lm in EM mode | EMLEDOL/ BP3C | 1800 x 27 |
| T8LED-FUSE | Fuse | - | - | - | - |