S

P

S

LGKEY

LGKEY/KEY







Features:

M-3G

- •Compliant with BSEN60669-1 BS1363 & BSEN60669-1 (where applicable)
- •CE Marked (where applicable)
- •Standard grid modules suitable for 25mm deep boxes





10 amp key switch - X-Rated

key for 10 amp key switch



LG204

4 gang 2 way

Features:

- · Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm
- X-rated for fluorescent or inductive loads



10 amp Plate Switches

All 10 amp switch modules are interchangeable with any plate product within the range

10 Amp Architrave Switches



LG202ARC

2 gang 2 way

Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Each terminal capable of accepting 3x1.5mm conductors
- X-rated for fluorescent or inductive loads



All 10 amp switch modules are interchangeable with any plate product within the range



Code No.	Description
LG201-2ARC	1 gang 2 way - X-Rated
LG202ARC	2 gang 2 way - X-Rated
LG205ARC/P	Push switch "Press" - X-Rated

Dimmers Push On / Off & No Derating Type Dimmer



Features:


D400 -1G

Standard dimmer:

- Compliant with BSEN60669-2-1 various
- CE Marked
- Fits a plaster depth (25mm) mounting box
- 3 Year Guarantee

No de-rating type dimmer:

- Suitable for control of quality dimmable electronic transformers, toroidal transformers and tungsten lamps WITHOUT de-rating
- For use with resistive and inductive loads
- Integrated over-temperature protection fuse
- Smooth dimming operation from 0-100% light output

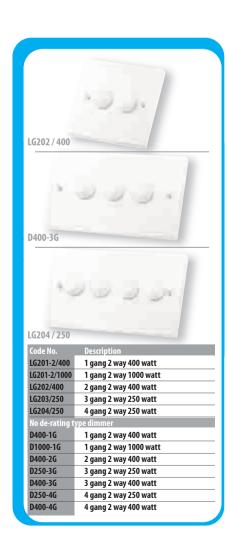

P

S






Features:

- Compliant with BS3676, BSEN60669
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth)
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



45 Amp DP Switches



LG951N 1 gang plate with neon


- Compliant with BS3676, BSEN60669
- CE Marked

13 Amp Socket Outlets



Features:

- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation

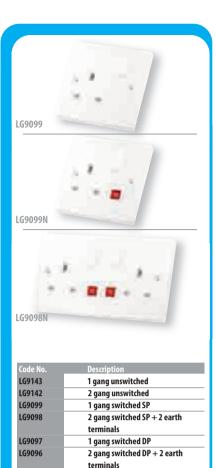

1 gang switched with neon SP

2 gang switched with neon SP

LG9099N

13 Amp Converter Sockets



- Compliant with BS1363
- Convert a single socket to a 2 gang switched socket with ease
- Convert a single or double socket to a 3 gang switched socket with ease







2 amp 3 pin 5 amp 3 pin



5 amp 3 pin **Features:**

LG9092

• Compliant with BS546

LG9228N LG9218

Code No.	Description
LG9228/3	3 amp unswitched
LG9228	13 amp unswitched
LG9228N	13 amp unswitched with neon
LG9218	13 amp DP switched
LG9218/F	13 amp DP switched with flex
	outlet on front plate
LG9218/3	3 amp DP switched
LG9218N	13 amp DP switched with neon
LG9218N/F	13 amp DP switched with neon
	with flex outlet on front plate
LG9218N/3	3 amp DP switched with neon

LG9218N

P

S

Fused Connection Units



- Compliant with BS1363 Part 4
- CE Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex

45 Amp Cooker Units



Features:

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor



socket with neons

Cable Outlets / Connectors



LG960

20 amp with optional cable entry

- Compliant with BS5733
- Terminals capable of accepting 3x2.5mm conductors for 20/25 amp
- Cable clamp located on inside of 45 amp plate capable of accepting 4mm to 16mm cable (LG962)



S

0

P

S





Code No.	Description
LG848-16	1 gang 16mm deep
LG828-16ARC	1 gang 16mm deep architrave
LG828-25	1 gang 25mm deep
LG828-32	1 gang 32mm deep
LG8288-32	2 gang 32mm deep
LG8288-25	2 gang 25mm deep
LG8288-16ARC	2 gang 16mm deep architrave
LG838-25	2 gang 25mm deep (dual, for
	two x 1 gang accessories)
LG838-47	1 gang 47mm deep
LG8388-47	2 gang 47mm deep
LG848CON	1 to 2 gang conversion box
	16mm
LG8288CON	1 to 2 gang conversion box
	25mm



LG828-16MET



Code No.	Description	
LG848-16MET	1 gang 16mm deep	
LG828-25MET	1 gang 25mm deep	
LG8288-25MET	2 gang 25mm deep	
LG828-35MET	1 gang 35mm deep	
LG8288-35MET	2 gang 35mm deep	
LG838-35MET	2 gang 35mm deep (dual, for	
	two x 1 gang accessories)	
LG838-47MET	1 gang 47mm deep	
LG8388-47MET	2 gang 47mm deep	

Flush Galvanised Steel boxes



LG838-35MET 2 gang 35mm deep dual

•Compliant with BS5733

•Knockouts provided on sides and bases for cable entry

- Compliant with BS4662
- Ample amount of knockouts provided to ensure as many uses as possible
- All galvanised steel boxes provided with brass earth terminal & screw
- Made of durable and long lasting steel
- Easy application, only for flush fittings
- Sliding lugs for easy installation
- Fitted with earth terminal

Dry Lining Boxes



Features:

- Compliant with BS5733
- Knockouts provided on sides and bases for cable entry
- Large lip-flange on front of each product to ensure firm connection with partitioning wall
- Specially designed lugs to ensure ease of clamping dry lining box with partitioning wall
- Dry lining boxes made of highly durable flame retardant thermoplastic
- Dry lining boxes capable of being used on partitioning thickness of 2-17mm

LG858 LG859 LG8699 LG858 1 gang 35mm deep 1 gang 47mm deep 2 gang 35mm deep LG858-47 LG8588 IG8588-47 2 gang 47mm deep IG859 round 35mm deep LG8599 2 gang 35mm deep (dual, for 2 x 1 gang) 3 gang 35mm deep (1 x dual , +1x single

Shaver Supply Unit



LG9870 Dual Voltage

- Compliant with BS3535
- Terminals capable of accepting 2x2.5mm conductors



P S S

0

P S



Description
1 gang TV surface mounting
2 gang TV surface mounting
1 gang TV flush
2 gang TV/FM flush
l gang TV flush isolated
2 gang TV/FM flush isolated
1 gang satellite flush
2 gang satellite flush
2 gang satellite flush - (1x Sat, 1 x
TV/FM)
3 gang satellite/TV/FM flush



Features:

- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals



Code No LG9111 1 gang 2 gang LG9112



2 gang

Features:

• Compliant with BS5733

Communication/Data Sockets



Features:

• Compliant with BABT & BSEN41003 where applicable



NLG1515/S

1 gang secondary flush (bakelite)

Features

• Compliant with BABT & BSEN41003 where applicable





Code No.	Description
NLG1514/S	1 gang master flush (bakelite)
NLG1515/S	1 gang secondary flush (bakelite)
NLG15161C/S	2 gang master flush (bakelite)
NLG15181C/S	2 gang secondary flush (bakelite)
LG1519/S	1 gang master surface, 2/4A
	screw terminals
LG1519/SBP	1 gang master surface, 2/4A
	screw terminals (clam pack)
LG1517/S	1 gang secondary surface, 2/4A
	screw terminals
LG1517BP	1 gang secondary surface, 2/3A IDC
	terminals (clam pack)
NLGRJ11	1 gang RJ11 (American computer/data)
	flush (bakelite)
NLGRJ11/2	2 gang RJ11 (American computer/data)
	flush (bakelite)
NLGRJ45	1 gang RJ45 (computer/data) flush
	(bakelite)
NLGRJ45/2	2 gang RJ45 (computer/data) flush
	(bakelite)
1550	IDC insertion tool
1551	IDC insertion tool with wire stripper
	for use with NLGRJ45 and NLGRJ45/2
LGJUN	IDC 4 terminal junction box

S











Code No.	Description
LGK825	5 amp 4 terminals 4x1.5mm white
LGK825B	5 amp 4 terminals 4x1.5mm black
LGK826	20 amp 4 terminals 4x2.5mm white
LGK826B	20 amp 4 terminals 4x2.5mm black
LGK826/M	20 amp 4 term. comp. (59mm dia.)
	white
LGK826-6	20 amp 6 term. compact 6 x 2.5mm
	white
LGK826-6B	20 amp 6 term. compact 6 x 2.5mm
	black
LGK828	30 amp 3 terminals 3x4mm white
LGK828B	30 amp 3 terminals 3x4mm black
LGK828/M	30 amp 3 term. comp. (82mm dia.)
	white
LGK828/MB	30 amp 3 term. comp. (82mm dia.) black
LGK829	60 amp 3 term. 142x90mm 3x2.5mm
	white
LGK829B	60 amp 3 term. 142x90mm 3x2.5mm
	black
LGK830	20 amp 4 large term. (59mm dia.) white
LGK830B	20 amp 4 large term. (59mm dia.) black



LGK830B 20 amp 4 large terminals (59mm dia) black

Features:

- Compliant with BS6220
- Selective entry and non-selective entry models available
- Selective entries highlighted by symbols and numbers on rotating cover
- Generous space allowed for slot terminals for ease of wiring
- Robust strongly built design and structure
- Rear entry knockouts supplied in base for convenience



LGK830

20 amp 4 large term. (59mm dia.) white

- Compliant with BS6220
- Selective entry and non-selective entry models available
- Selective entries highlighted by symbols and numbers on rotating cover
- Generous space allowed for slot terminals for ease of wiring
- Robust strongly built design and structure
- \bullet Rear entry knockouts supplied in base for convenience

Link Boxes



LINK1

100 amp link box 1 pole

Features:

- Terminal LINK1 1x6 way terminal
- Terminal LINK2 2x5 way terminals
- Terminal Capacity for LINK1 and LINK2 35mm²



LINK1 LINK2 100 amp link box 1 pole 100 amp link box 2 pole

Ceiling Switches



LG1730

10 amp X-rated 1 way

Features:

- Compliant with BS3676 & BSEN 60669-1
- All items supplied with 1.5mt cord
- Fixing screws supplied



 Code No.
 Description

 LG1730
 10 amp X-rated 1 way

 LG1731
 10 amp X-rated 2 way

 LG954N
 45 amp DP switch with neon 1 way

P

S

LG1735



Code No.	Description
LG1735/6T2	Pre-wired clear base 6" pendant T2 100W
LG1735/9T2	Pre-wired clear base 9" pendant T2 100W
LG1735	Ceiling rose clear base 3 terminal
	& earth with flex strain

Pendant Sets & Ceiling Rose



LG1735/6T2

Pre-wired clear base 6" T2 100 watt

Features:

- Compliant with BSEN60598-2-1BS4533 / BSEN61184 / BS67
- Ceiling rose dimensions 86x26mm
- Heat resistant Basec approved cable
- Terminals capable of accepting up to 3x1.5mm conductors
- Eight in-line angled terminals with captive screws for ease of wiring
- Ample knockout spaces on base for ease of wiring
- Strong flex strain
- · Large earth terminal for ease of wiring



Code No.	Description
LG9488	pendant T2 short skirt
LG8542	pendant T1 switched
LG8332/2	batten T2
LG8331	batten T1 angled
LG8331/2	batten T2 angled
LG8327	batten T2 pre-wired clear ceiling rose base
LG8317	batten T2 pre-wired clear ceiling rose base angled





LG8327 batten T2 pre-wired

- Compliant with BSEN61184 / BS5042
- T1 suitable up to 60W
- T2 suitable up to 100W
- Batten holders T2, 2 terminals & earth
- Easy access design for all screws and terminals
- T2 lampholders terminal capacity 1.5mm conductors


Plugs & Adaptors





LG8191AS

13 amp anti-surge & spike plug







LG9168 UK plug to Continental travel adaptor





	1.0011
Code No.	Description
LG8191/3	3 amp fused plug
LG8191/5	5 amp fused plug
LG8191/13	13 amp fused plug
LG8191/B	13 amp fused plug, black
LG8191PK2	13 amp fused plug, pack of 2
LG8191T	13 amp socket tester plug (checks new 8
	3/5/13 amp fuses are operating safely)
LG8191AS	13 amp anti-surge & spike plug
LG102W	13 amp fused rubber plug white
LG102B	13 amp fused rubber plug black
LG8194	15 amp plug 3 round pins
LG8193	5 amp plug 3 round pins
LG8192	2 amp plug 3 round pins
LG8428	13 amp 2 way unfused adaptor
LG8428BP	13 amp 2 way unfused adaptor
	(clam pack)
LG8998	13 amp 3 way fused adaptor
LG8998BP	13 amp 3 way fused adaptor (clam pack)
LG8780	13 amp shaver adaptor, fused 1 amp
LG8780BP	13 amp shaver adaptor, fused 1 amp
	(clam pack)
LG9138	Safety blanking plugs, pack of 5 for
	covering unused sockets
LG9168	UK plug to Continental travel adaptor
LG9168BP	UK plug to Continental travel adaptor
	(clam pack)
LG9169	Continental plug (Shuko) to UK plug
	travel adaptor
LG9169BP	Continental plug (Shuko) to UK plug
	travel adaptor (clam pack)
LG8191UNI	Universal worldwide (most countries)
	plug to UK plug travel adaptor







Code No.	Description
Domestic Fuse	
LG700	3 amp plug top fuse
LG701	5 amp plug top fuse
LG703	13 amp plug top fuse
LG704	25 cards of 4 - 3 amp fuses blister
LG705	25 cards of 4 - 5 amp fuses blister
LG706	25 cards of 4 - 13 amp fuses blister
LG707	1 card of 10 - 3 amp fuses blister
LG708	1 card of 10 - 5 amp fuses blister
LG709	1 card of 10 - 13 amp fuses blister
LG713	3 amp fuse card 72 (18 bags of 4 fuses)
LG714	5 amp fuse card 72 (18 bags of 4 fuses)
LG715	13 amp fuse card 72 (18 bags of 4 fuses)
LG718	Assorted fuses card 72
EG7 10	(18 bags of 4 fuses)
LG721	assorted fuse wire card 24
LG/21	(5 amp/15 amp/30 amp)
ConcumorUnit	
Consumer Unit	
	5 amp consumer unit fuse
LG731	10 amp consumer unit fuse
LG732	15 amp consumer unit fuse
LG733	20 amp consumer unit fuse
LG711	30 amp consumer unit fuse
LG712	45 amp consumer unit fuse
LG734	60 amp consumer unit fuse
LG735	80 amp consumer unit fuse
LG737	100 amp consumer unit fuse
Shaver Fuses	
BL1	1 amp fuse link shaver BS646
BL2	2 amp fuse link shaver BS646
BL3	3 amp fuse link shaver BS646
BL5	5 amp fuse link shaver BS646
	ss Fuses (5mm X 20mm)
PDC100MA	quick - blow glass fuse 100mA
PDC1A	quick - blow glass fuse 1A
PDC200MA	quick - blow glass fuse 200mA
PDC25A	quick - blow glass fuse 2.5A
PDC315MA	quick - blow glass fuse 315mA
PDC500MA	quick - blow glass fuse 500mA
PDC5A	quick - blow glass fuse 5A
PDC800MA	quick - blow glass fuse 800mA
Anti-Surge Gla	ss Fuses (5mm X 20mm)
PDC100MAS	anti - surge glass fuse 100mA
PDC1AS	anti - surge glass fuse 1A
PDC200MAS	anti - surge glass fuse 200mA
PDC25AS	anti - surge glass fuse 2.5A
PDC315MAS	anti - surge glass fuse 3151mA
PDC500MAS	anti - surge glass fuse 500mA
PDC5AS	anti - surge glass fuse 5A
PDC800MAS	anti - surge glass fuse 800mA



LG703

13 amp plug top fuse

Features:

- Kitemark and/or ASTA/BSI Approved
- Rated voltage: 240V a.c. Fusing factor: not exceeding 1.5
- LG700 BS1362 (Class: PL, Red)
- LG701 BS1362 (Class: PL, Black)
- LG703 BS1362 (Class: PL, Brown)
- Type "PL" fuse-links are intended primarily for use in domestic plugs but may also be installed in appropriate single-phase installations with fault levels up to 6kA and have nominal dimensions of 6.3 x 25.4mm.



LG733

20 amp consumer unit fuse

- Kitemark and/or ASTA/BSI Approved
- Rated voltage: 240V a.c. Fusing factor: not exceeding 1.5
- LG730 BS1361 Type I (Class: LA, White)
- LG731 BS1361 Type I (Class: LC, Black)
- LG732 BS1361 Type I (Class: LC, Blue)
- LG733 BS1361 Type I (Class: LC, Yellow)
- LG711 BS1361 Type I (Class: LD, Red)
- LG712 BS1361 Type I (Class: LK, Green)

- Rated voltage: 415V a.c. Fusing factor: not exceeding 1.5
- LG734 BS1361 Type | Ta (Class: ME, White)
- LG735 BS1361 Type | (Class: ME, White)
- LG737 BS1361 Type ∏b (Class: MF, White)
- These fuse-links comply with the requirements of IEC 60269-3 which forms the basis of the future BS88: Part 3, superseding the present BS 1361.

10 amp Plate Switches

LG201-2BP 1 gang 2 way

Features:

• CE Marked



All 10 amp switch modules are interchangeable with any plate product within the WHITE MOULDED range



13 Amp Socket Outlets

• X-rated for fluorescent or inductive loads





- Compliant with BS1363
- Terminals capable of accepting up to 4x2.5mm conductors
- 2 earth terminals for easy installation







Description
13 amp DP switched with neon



LG9218NBP

13 amp DP switched with neon

Features:

- Compliant with BS1363 Part 4
- **CE** Marked
- Terminals capable of accepting 3x2.5mm, 4x2.5mm (Earth) conductors
- Optional cable outlet located at bottom edge of faceplate as a knockout
- Cable clamp located on inside of plate capable of accepting 2.5mm flex



LG953NBP

S S

P

S

with 13 amp switched socket with neons

45 Amp Cooker Unit



LG953NBP

With 13 amp switched socket with neons

- Compliant with BS4177
- Terminals cap able of accepting up to 2x10mm, 1x10mm each conductor

Surface Pattress Boxes



LG8288-25BP 2 gang 25mm deep

Features:

- •16mm deep box provided with earth terminal
- •Compliant with BS5733
- •Knockouts provided on sides and bases for cable entry







LG858BP

1 gang 35mm deep

Features:

- Compliant with BS5733
- Knockouts provided on sides and bases for cable entry
- Large lip-flange on front of each product to ensure firm connection with partitioning wall
- Specially designed lugs to ensure ease of clamping dry lining box with partitioning wall
- Dry lining boxes made of highly durable flame retardant thermoplastic
- Dry lining boxes capable of being used on partitioning thickness of 2-17mm



Code No. Description
LG858BP 1 gang 35mm deep
LG858BP 2 gang 35mm deep

e S

LG9111

LG9111BP LG9112BP





LG2162BP

1 gang TV flush

Features:

- Compliant with BS3041 where applicable
- Isolated versions suitable for use with multi-outlet aerial commercial systems
- Suitable for use with VHF/UHF TV &VHF signals



1 gang 2 gang

LG9112BP 2 gang

Features:

• Compliant with BS5733

Blanking Plates



Junction Boxes



Features:

LGK828BP

- Compliant with BS6220
- Selective entry and non-selective entry models available
- Selective entries highlighted by symbols and numbers on rotating cover
- Generous space allowed for slot terminals for ease of wiring
- Robust strongly built design and structure
- Rear entry knockouts supplied in base for convenience



Ceiling Switches







P

S

LG1735BP



	Code No.	Description
	LG1735/6T2BP	Pre-wired clear base 6" pendant T2
		100W
	LG1735/9T2BP	Pre-wired clear base 9" pendant T2 100W
	LG1735BP	Ceiling rose clear base 3 terminal
Ĺ		& earth with flex strain

Pendant Sets & Ceiling Rose



LG1735/6T2BP

Pre-wired clear base 6" T2 100 watt

Features:

- Compliant with BSEN60598-2-1BS4533 / BSEN61184 / BS67
- Ceiling rose dimensions 86x26mm
- Heat resistant Basec approved cable
- Terminals capable of accepting up to 3x1.5mm conductors
- Eight in-line angled terminals with captive screws for ease of wiring
- Ample knockout spaces on base for ease of wiring
- Strong flex strain
- · Large earth terminal for ease of wiring





Code No. LG9488BP

pendant T2 short skirt



LG9488BP Pendant T2 short skirt

- Compliant with BSEN61184 / BS5042
- T1 suitable up to 60W
- T2 suitable up to 100W
- Batten holders T2, 2 terminals & earth
- Easy access design for all screws and terminals
- T2 lampholders terminal capacity 1.5mm conductors

13 Amp Trailing Sockets



1 gang, white Features:

9128BP

- Plug and socket compliant with BS1363/A & Kitemark
- Each piece 100% inspected and tested before being released for sale
- Each piece 100% earth tested before being released for sale
- Each piece 100% strength ('Flash Tested') between all 3 poles before being released for sale
- 100% pole correctness inspection
- 100% appearance and function tested specifications



8828BP

Code No.	Description
9128BP	1 gang, white
8828BP	2 gang with neon, white

Flex & Appliance Connectors



LG1923BP

13 amp PVC flex connector, 3 terminals

Features:

- Plug and socket compliant with BS1363/A & Kitemark
- Each piece 100% inspected and tested before being released for sale
- Each piece 100% earth tested before being released for sale
- Each piece 100% strength ('Flash Tested') between all 3 poles before being released for sale
- 100% pole correctness inspection
- 100% appearance and function tested specifications



LG1922BP

LG1922BP LG1923BP

5 amp PVC flex connector, 2 terminals 13 amp PVC flex connector, 3 terminals