



Please find below a selection of our fast moving products, for full product list and further information please get in touch with us on +44 (0)1925 232662 or email us at [mail@alliedexport.co.uk](mailto:mail@alliedexport.co.uk)

# ► Fixings and Fasteners

## Wood screws

### ► Pozi Countersunk Twinthread Woodscrew BZP

**Material:** Steel C1022, case hardened  
**Finish:** Bright Zinc Plated



Boxed in 200s/100s




Code	Size
HE04050	4 X 1/2"
HE04075	4 X 3/4"
HE0458	4 X 5/8"
HE06050	6 X 1/2"
HE06075	6 X 3/4"
HE06100	6 X 1"
HE06125	6 X 1 1/4"
HE06150	6 X 1 1/2"
HE06200	6 X 2"
HE0658	6 X 5/8"
HE07100	7 X 1"
HE07125	7 X 1 1/4"

HE07150	7 X 1 1/2"
HE08050	8 X 1/2"
HE08075	8 X 3/4"
HE08100	8 X 1"
HE08125	8 X 1 1/4"
HE08150	8 X 1 1/2"
HE08175	8 X 1 3/4"
HE08200	8 X 2"
HE08250	8 X 2 1/2"
HE08300	8 X 3"
HE10100	10 X 1"
HE10125	10 X 1 1/4"
HE10150	10 X 1 1/2"

HE10175	10 X 1 3/4"
HE10200	10 X 2"
HE10250	10 X 2 1/2"
HE10300	10 X 3"
HE10350	10 X 3 1/2"
HE10400	10 X 4"
HE12150	12 X 1 1/2"
HE12200	12 X 2"
HE12250	12 X 2 1/2"
HE12300	12 X 3"
HE12350	12 X 3 1/2"
HE12400	12 X 4"

### ► Pozi Round Twinthread Woodscrew BZP

**Material:** Steel C1022, case hardened  
**Finish:** Bright Zinc Plated

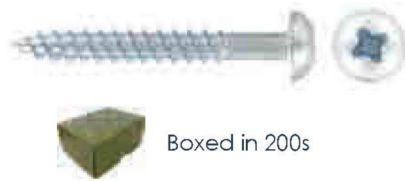

Boxed in 200s

Code	Size
HG06100	6 X 1"
HG08075	8 X 3/4"
HG08100	8 X 1"
HG08125	8 X 1 1/4"
HG08150	8 X 1 1/2"
HG08175	8 X 1 3/4"

HG08200	8 X 2"
HG10100	10 X 1"
HG10125	10 X 1 1/4"
HG10150	10 X 1 1/2"
HG10200	10 X 2"
HG10250	10 X 2 1/2"
HG10300	10 X 3"

### ► Concrete Direct Screw Steel



Steel fixing designed to avoid the need for wall plugs. Simply drill pilot hole (4mm) and screw directly into a variety of substrates such as brickwork, sand/lime stone etc.

Code	Size
HM4845	4.8 x 45

4mm SDS Masonry Bits see Page 48

### ► Slot Round Woodscrew Black

**Standard:** DIN 96; BS1210  
**Material:** Mild Steel  
**Finish:** Chemical Black



Boxed in 200s

Code	Size
WR08075J	8 X 3/4"
WR08100J	8 X 1"
WR08125J	8 X 1 1/4"

WR08150J	8 X 1 1/2"
WR08200J	8 X 2"
WR10150J	10 X 1 1/2"
WR10200J	10 X 2"

### ► Drywall Screw Black

**Material:** Steel C1022, case hardened  
**Finish:** Chemical Black



Boxed in 200s

Code	Size
HD3525	M3.5 X 25
HD3532	M3.5 X 32
HD3538	M3.5 X 38

HD3542	M3.5 X 42
HD3550	M3.5 X 50
HD3560	M3.5 X 60
HD4275	M4.2 X 75

# ► Fixings and Fasteners

## Megabucket

### ► All megabuckets consist of:

- Tough, reusable storage tubs.
- Fast-selling fixings



Code	Size
MTB	<b>RED PLUGS &amp; SCREWS</b> 500 8 X 1 1/2 Pozi Twinthreads 500 Red Wall Plugs 2 Pozi Driver Bits
MTZ	<b>DRIVA PLASTERBOARD FIXINGS</b> 200 Self Drive Fixings 200 Screws to suit 2 Pozi Driver Bits
MTC	<b>FLAT GREY CABLE CLIPS</b> 400 1.0/1.5mm T&E Clips 400 2.5mm T&E Clips
MT10	<b>BROWN PLUGS &amp; SCREWS</b> 400 10 x 2 Pozi Twinthreads 400 Brown Wall Plugs 2 Pozi Driver Bits
MTNC	<b>CLOUT NAILS</b> 2Kg - 40mm Galvanised
MTFC	<b>CONFORMITY CLIP BUCKET</b> 100 - Concrete Direct Screws 100 - 25mm Fire Clips 20 - 38mm 10 - 50mm 1 - 4.0 x 160 SDS Drills

## Driver Bits

### ► Driver Bits

**Standard:** DIN3128

**Material:** Steel S2 Tool Grade

**Finish:** Sandblasted



Code	Size
PH21	2 x 1 Phillips Driver Bit
PH22	2 x 2 Phillips Driver Bit
PR21	2 x 1 Square Driver Bit
PR22	2 x 2 Square Driver Bit
PZ21	2 x 1 Pozi Driver Bit
PZ22	2 x 2 Pozi Driver Bit
BPTT	Pin Torx Adapter
MAG	60mm Magnetic Bit Holder

### ► Hex Head Adapter

**Standard:** DIN3126/ISO1173

**Material:** Steel S2 Tool Grade

**Finish:** Sandblasted

Code	Size
TDA	For 4.8 and 5.5 hex head



## Square Lok Screws

### ► Square Drive CSK Twinthread Woodscrew

**Material:** Steel C1022, case hardened

**Finish:** Bright Zinc Plate



Boxed in 200s/100s

Code	Size
HL08050	8 x 1/2"
HL08075	8 x 3/4"
HL08100	8 x 1"
HL08125	8 x 1 1/4"
HL08150	8 x 1 1/2"
HL08175	8 x 1 3/4"
HL08200	8 x 2"

HL08250	8 x 2 1/2"
HL08300	8 x 3"
HL10100	10 x 1"
HL10125	10 x 1 1/4"
HL10150	10 x 1 1/2"
HL10200	10 x 2"
HL10250	10 x 2 1/2"
HL10300	10 x 3"

# ► Fixings and Fasteners

## Metalworking & Brass Screws

### ► Pozi Pan-Head Steel Machine Screw BZP

**Standard:** DIN 7985; BS4183

**Material:** Steel

**Finish:** Bright Zinc Plated  
Bagged in 100s



Code	Size
UP412	M4 x 12
UP416	M4 x 16
UP420	M4 x 20
UP425	M4 x 25
UP450	M4 x 50
UP510	M5 x 10
UP512	M5 x 12
UP516	M5 x 16
UP520	M5 x 20

UP525	M5 x 25
UP530	M5 x 30
UP540	M5 x 40
UP550	M5 x 50
UP612	M6 x 12
UP616	M6 x 16
UP620	M6 x 20
UP625	M6 x 25
UP630	M6 x 30
UP650	M6 x 50

### ► Pozi Countersunk Steel Machine Screw BZP

**Standard:** DIN 965; BS4183

**Material:** Steel

**Finish:** Bright Zinc Plated  
Bagged in 100s



Code	Size
UE412	M4 x 12
UE420	M4 x 20
UE425	M4 x 25
UE510	M5 x 10
UE512	M5 x 12
UE516	M5 x 16
UE520	M5 x 20
UE525	M5 x 25
UE530	M5 x 30

UE540	M5 x 40
UE550	M5 x 50
UE612	M6 x 12
UE616	M6 x 16
UE620	M6 x 20
UE625	M6 x 25
UE630	M6 x 30
UE640	M6 x 40
UE650	M6 x 50

### ► Slot Round Woodscrew Brass

**Standard:** DIN 97; BS1210

**Material:** Brass

**Finish:** Self Colour



Boxed in 200s/100s

Code	Size
BR06075	6 x 3/4"
BR06100	6 x 1"
BR06125	6 x 1 1/4"
BR06150	6 x 1 1/2"
BR08075	8 x 3/4"
BR08100	8 x 1"
BR08125	8 x 1 1/4"
BR08150	8 x 1 1/2"
BR08200	8 x 2"



### ► Slot Csk Woodscrew Brass

**Standard:** DIN 97; BS1210

**Material:** Brass

**Finish:** Self Colour

Code	Size
BC10200	10 x 2
BC10250	10 x 2 1/2
BC10300	10 x 3
BC12200	12 x 2
BC12250	12 x 2 1/2
BC12300	12 x 3



# ► Fixings and Fasteners

## Self Tapping Screws

### ► Pozi Countersunk

**Standard:** DIN 7982 type C;  
BS4174 AB  
**Material:** C1022 Steel  
**Finish:** Bright Zinc Plate




Boxed in 200s/100s

Code	Size
TE06050	6 x 1/2"
TE06075	6 x 3/4"
TE06100	6 x 1"
TE06125	6 x 1 1/4"
TE06150	6 x 1 1/2"
TE08050	8 x 1/2"
TE08075	8 x 3/4"

TE08100	8 x 1"
TE08125	8 x 1 1/4"
TE08150	8 x 1 1/2"
TE08200	8 x 2"
TE10100	10 x 1"
TE10125	10 x 1 1/4"
TE10150	10 x 1 1/2"

### ► Pozi Panhead

**Standard:** DIN 7981 type C;  
BS4174 AB  
**Material:** C1022 Steel  
**Finish:** Bright Zinc Plate



Boxed in 200s/100s

Code	Size
TG06075	6 x 3/4"
TG06100	6 x 1"
TG06125	6 x 1 1/4"
TG06150	6 x 1 1/2"
TG08050	8 x 1/2"
TG08075	8 x 3/4"
TG08100	8 x 1"

TG08125	8 x 1 1/4"
TG08150	8 x 1 1/2"
TG08200	8 x 2"
TG10100	10 x 1"
TG10125	10 x 1 1/4"
TG10150	10 x 1 1/2"
TG10200	10 x 2"
TG12050	12 x 1/2"

## Nails

### ► Galv Clout Nails (120g Bag) BZP

**Material:** Steel  
**Finish:** Galvanized

Code	Size	Approx Qty
ZNC30	30MM	78
ZNC40	40MM	65



### ► Masonry Nails BZP

**Material:** Hardened Steel  
**Finish:** Bright Zinc

Code	Size
NM25	25MM
NM30	30MM
NM40	40MM
NM50	50MM



Boxed in 100s

### ► Washered Masonry Nails BZP

**Material:** Hardened Steel  
**Finish:** Bright Zinc  
Boxed in 100s

Code	Size
NMW25	25MM
NMW30	30MM
NMW35	35MM



### ► Clout Nails Megabucket

Code	Size
MTNC	<b>CLOUT NAILS</b> 2Kg - 40mm Galvanised



# ► Fixings and Fasteners

## Drill Screws



- Deligo's own brand of drill screws - *sprintpoint™* - will self-drill through sheet metal, eradicating the need for drilling pilot holes, or using regular self-tapping screws.

**They are perfect for numerous applications, including:**

- Fixing to conduit
- Conduit to conduit
- Fixing to trunking
- Replacing roofing bolt and nuts



Boxed in 200s



### ► Hex Head Drill Screw **BZP**

**Standard:** DIN7504 K

**Material:** C1022 Steel, Case Hardened

**Finish:** Bright Zinc Plate

Code	Size
TD4819	4.8 x 19
TD4825	4.8 x 25
TD4832	4.8 x 32
TD5525	5.5 x 25
TD5532	5.5 x 32
TD5538	5.5 x 38
TD5557	5.5 x 57
TD5570	5.5 x 70
TDW55	5.5 BONDED WASHER



### ► Pozi Pan Drill Screw Shallow Head **BZP**

**Standard:** DIN 7504

**Material:** C1022 Steel

**Finish:** Bright Zinc Plate

Code	Size
UPSD4816	4.8 x 16
UPSD4835	4.8 x 35
UPSD5520	5.5 x 20
UPSD5540	5.5 x 40



Boxed in 00s



### ► Pozi Pan Drill Screw **BZP**

**Standard:** DIN 7504 type N

**Material:** C1022 Steel

**Finish:** Bright Zinc Plate

Code	Size
UPSD3913	3.9 x 13
UPSD3916	3.9 x 16
UPSD3919	3.9 x 19
UPSD3925	3.9 x 25
UPSD3932	3.9 x 32
UPSD3938	3.9 x 38



### ► Countersunk Drill Screw **BZP**

**Standard:** DIN 7504 P

**Material:** Steel C1022, case hardened

**Finish:** Bright Zinc Plate

Code	Size
UCSD3913	3.9 x 13
UCSD3916	3.9 x 16
UCSD3919	3.9 x 19
UCSD3925	3.9 x 25
UCSD3932	3.9 x 32
UCSD3938	3.9 x 38



### ► Wafer Head Drill Screw **BZP**

**Standard:** DIN7504

**Material:** Steel C1022, case hardened

**Finish:** Bright Zinc Plate

Code	Size
UFSD4213	4.2 x 13
UFSD4219	4.2 x 19
UFSD4225	4.2 x 25
UFSD4855	4.8 x 55
UFSD4865	4.8 x 65
UFSD4870	4.8 x 70
UFSD4880	4.8 x 80
UFSD4895	4.8 x 95



# ► Fixings and Fasteners

## Electrical Machine Screws



### ► M3.5 Socket Pin Nickel Plated

**Standard:** DIN 964 Slotted  
**Material:** Mild Steel  
**Finish:** Nickel Plated



Boxed in 100s

Code	Size
BPN3512N	M3.5 x 12
BPN3516N	M3.5 x 16
BPN3520N	M3.5 x 20
BPN3525N	M3.5 x 25
BPN3530N	M3.5 x 30

BPN3535N	M3.5 x 35
BPN3540N	M3.5 x 40
BPN3550N	M3.5 x 50
BPN3560N	M3.5 x 60
BPN3575N	M3.5 x 75
BPN35100N	M3.5 x 100

### ► M3.5 Socket Pin Security Screw

**Usage:** Suitable for hospitals and prisons  
**Standard:** DIN 964 Pin Torx Security  
**Material:** Mild Steel  
**Finish:** Nickel Plated  
**Application:** Tool Required



Code	Size
BPT	M3.5 x 50
BPTT	T20 Tool

### ► M3.5 Socket Pin E-Brass

**Standard:** DIN 964 Slotted  
**Material:** Mild Steel  
**Finish:** Electro-brass



Code	Size
BPN3550SC	M3.5 X 50
BPN3575SC	M3.5 X 75

### ► M3.5 Screw Nylon

**Standard:** DIN 965 Slotted  
**Material:** Nylon  
**Finish:** Clear



Code	Size
BPNN35	M3.5 X 35

### ► M3.5 Extension Stud for Socket Pin

**Material:** Brass  
**Finish:** Self Colour



Code	Size
BPNC	M3.5

### ► M3.5 Socket Pin Flat

**Standard:** DIN965 Slotted  
**Material:** Mild Steel  
**Finish:** Nickel Plated



Code	Size
BPNF	3.5 X 50

## Conduit Screws, Nuts & Washers

### ► Slot Pan Screw Brass

**Standard:** DIN 85  
**Material:** Brass  
**Finish:** Self Colour



Code	Size
BPR46	M4 X 6
BPR48	M4 X 8
BPR410	M4 X 10
BPR412	M4 X 12
BPR416	M4 X 16
BPR420	M4 X 20

BPR425	M4 X 25
BPR430	M4 X 30
BPR435	M4 X 35
BPR440	M4 X 40
BPR450	M4 X 50
BPR460	M4 X 60
BPR475	M4 X 75

### ► 2BA Slot Round Screw Brass

**Standard:** BS 57 Slotted  
**Material:** Brass  
**Finish:** Self Colour



Code	Size
2BA050	2BA X 1/2"
2BA075	2BA X 3/4"
2BA1	2BA X 1"
2BA125	2BA X 1 1/4"
2BA150	2BA X 1 1/2"
2BA2	2BA X 2"

### ► 2BA Nuts and Washers

**Standard:** BS 57 Slotted  
**Material:** Brass  
**Finish:** Self Colour



Code	Size
2BAN	2BA NUTS
2BAW	2BA WASHERS



# ► Fixings and Fasteners

## Brass Fasteners

### ► Hex Full Nut Brass

**Standard:** DIN 934; BS3692  
**Material:** Brass  
**Finish:** Self Colour



Code	Size
IBN3.5	M3.5
IBN4	M4
IBN5	M5
IBN6	M6
IBN8	M8
IBN10	M10
IBN12	M12

### ► Washer Brass

**Standard:** DIN 125; BS4320B  
(M4 BS4320A)  
**Material:** Brass  
**Finish:** Self Colour



Code	Size
IBW3.5	M3.5
IBW4	M4
IBW6	M6
IBW8	M8
IBW10	M10
IBW12	M12

### ► Spring Washer Phos. Bronze

**Standard:** DIN 127; BS4464  
**Material:** Phosphor Bronze  
**Finish:** Self Colour



Code	Size
IPSW6	M6
IPSW8	M8
IPSW10	M10
IPSW12	M12

### ► Hex Set Screw Brass

**Standard:** DIN 933  
**Material:** Brass  
**Finish:** Self Colour



Code	Size
IBS612	M6 X 12
IBS616	M6 X 16
IBS620	M6 X 20
IBS625	M6 X 25
IBS630	M6 X 30
IBS635	M6 X 35
IBS640	M6 X 40
IBS650	M6 X 50
IBS820	M8 X 20
IBS825	M8 X 25
IBS830	M8 X 30
IBS835	M8 X 35
IBS840	M8 X 40
IBS850	M8 X 50
IBS1020	M10 X 20
IBS1025	M10 X 25
IBS1030	M10 X 30
IBS1035	M10 X 35
IBS1040	M10 X 40
IBS1050	M10 X 50
IBS1225	M12 X 25
IBS1230	M12 X 30
IBS1240	M12 X 40
IBS1250	M12 X 50

## Stainless Steel Fasteners

### ► A2 Full Nut

**Standard:** DIN 934; BS3692  
**Material:** Stainless Steel A2, A304  
**Finish:** Self Colour



Code	Size
SSNM6	M6
SSNM8	M8
SSNM10	M10

### ► A2 Set Screw

**Standard:** DIN 933  
**Material:** Stainless Steel A2, A304  
**Finish:** Self Colour



Code	Size
SSSM625	M6 x 25
SSSM825	M8 x 25
SSSM1025	M10 x 25

### ► A2 Washer

**Standard:** DIN 125; BS4320B  
**Material:** Stainless Steel A2, A304  
**Finish:** Self Colour



Code	Size
SSWM6	M6
SSWM8	M8
SSWM10	M10

### ► A2 Channel Nut

**Standard:** Conforms with BS 6946  
**Material:** Stainless Steel A2, A304  
**Finish:** Self Colour



Code	Size
CNM6S	M6 Plain
CNM8S	M8 Plain
CNM10S	M10 Plain
CNS6S	M6 Short

CNS8S	M8 Short
CNS10S	M10 Short
CNL6S	M6 Long
CNL8S	M8 Long
CNL10S	M10 Long



# ► Fixings and Fasteners

## Heavy Duty Fixings

### ► Loose Bolt ZY

**Material:** Steel (8.8 Bolts)

**Usage:** Heavy duty installation, ideal when heavy items have to be slid into place.

**Application:** Holding down machinery, structural fixings (Strut accessories) & switchgear.

**Substrate Applicable:** Concrete, Stone and Solid brickwork

Code	Size	Thread	Shield (a)	Bolt Length (b)	Max Fix Size (c)
IL610	6 x 60	M6	40mm	55mm	10mm
IL630	6 x 80	M6	40mm	75mm	30mm
IL810	8 x 60	M8	50mm	60mm	10mm
IL830	8 x 80	M8	50mm	80mm	30mm
IL1010	10 x 70	M10	60mm	70mm	10mm
IL1030	10 x 90	M10	60mm	90mm	30mm
IL1050	10 x 115	M10	60mm	110mm	50mm
IL1210	12 x 80	M12	80mm	90mm	10mm
IL1230	12 x 100	M12	80mm	110mm	30mm



### ► Projection Bolt ZY


**Material:** Steel (8.8 Bolts)

**Usage:** Heavy duty installation, ideal when items are to be placed over the stud.

**Application:** Overhead work, cable tray, ducting, pipes & strut accessories.

**Substrate Applicable:** Concrete, Stone and Solid brickwork.

Code	Size	Thread	Shield (a)	Bolt Length (b)	Max Fix Size (c)
IP810	M8 x 70	M6	40mm	62mm	7mm
IP1015	M10 x 85	M8	50mm	78mm	9mm
IP610	M6 x 60	M10	60mm	85mm	11mm



### ► Eye Bolt Shield ZY

**Material:** Steel (4.8 Bolts)

**Usage:** Heavy duty installation

**Application:** Wire, cable, steel rope, chain

**Substrate Applicable:** Concrete, Stone and Solid brickwork.

Code	Size	Thread	Shield (a)	Max Fix Size (c)
IBSA6	M6	M6	40mm	8mm
IBSA8	M8	M8	50mm	10mm
IBSA10	M10	M10	60mm	12.5mm



### ► Through Bolt ZY


**Material:** Steel

**Usage:** Medium duty internal thread, fit flush to wall.

**Application:** Ideal for holding down items, racking, base strut accessories.

**Substrate Applicable:** Concrete-Limited suitability in stone.

Code	Size	Thread	Shield (a)	Max Fix Size (c)
IT0655	M6 x 55	M6	55mm	15mm
IT0850	M8 x 50	M8	50mm	10mm
IT0880	M8 x 80	M8	80mm	35mm
IT1060	M10 x 60	M10	60mm	10mm
IT1090	M10 x 90	M10	90mm	30mm
IT12100	M12 x 100	M10	120mm	60mm
IT10120	M10 x 120	M12	80mm	20mm
IT1280	M12 x 80	M12	100mm	30mm




### ► Masonry Bolt ZY

**Material:** Steel (8.8 Bolts)

**Usage:** Heavy duty and fast installation

**Application:** Overhead work, cable tray, ducting, pipes & strut accessories.

**Substrate Applicable:** Concrete, Stone and Solid brickwork.



Code	Size
MB650	M6 X 50
MB875	M8 X 75
MB1075	M10 X 75
MB1275	M12 X 75

# ► Fixings and Fasteners

## Heavy Duty Fixings

### ► Wedge Drop-In Anchor ZY

**Material:** Steel

**Usage:** Medium duty internal thread

**Application:** Ideal for suspension of cable tray, ductwork

**Substrate Applicable:** Concrete-Limited suitability in stone and solid brickwork

Code	Size	Length (b)
IASM6	M6	25mm
IASM8	M8	30mm
IASM10	M10	40mm
IASM12	M12	50mm



### ► Setting Tool BZP

**Material:** Steel

**Usage:** To use with wedge drop-in anchors.



Code	Size
IST6	M6
IST8	M8
IST10	M10
IST12	M12

### ► Lipped Drop-In Anchor BZP

**Material:** Steel

**Usage:** Medium duty internal thread, fit flush to wall

**Application:** Ideal for suspension of cable tray, ductwork

**Substrate Applicable:** Concrete-Limited suitability in stone and solid brickwork.

Code	Size	Length (b)
LDA6	M6	25mm
LDA8	M8	30mm
LDA10	M10	40mm



### ► Wire Hanger ZY

**Material:** Steel

**Usage:** Medium duty installation, expansion type

**Application:** Suspended ceilings, catenary/suspension wire

**Substrate Applicable:** Concrete, Stone and solid brickwork.

Code	Size	Length (b)
IWH660	M6 X 60	60mm



### ► Wall Plugs

**Drill Size (Plug Length)**

**Yellow:** 5mm (25mm)

**Red:** 5.5 (30mm)

**Brown:** 7.0mm (35mm)

Code	Size
MPYELLOW	Yellow
MPRED	Red
MPBROWN	Brown



### ► Galvanised Banding Strap

Code	Size
BANDG	12mm x 10m



### ► Coated Banding Strap

Code	Size
BAND	12mm x 10m Black
BANDR	12mm x 10m Red
BANDW	12mm x 10m White
BAND17	17mm x 10m Black

### ► Cable Guard

- Unique double-secure fixing points
- Protects cables and pipes from nail, screw or drill damage
- Enormously popular range, already outselling others
- 54 x 80mm
- No fixings necessary
- NHBC approved
- Helps IEE regulations

Code	Size
SP	54mm x 80mm





# ► Fixings and Fasteners

## Heavy Duty Fixings

### ► Concrete Screw BZP

**Material:** Steel

**Usage:** Suitable for fitting overhead installations and many substrates.

**Substrate Applicable:** Cracked concrete, non-cracked concrete, hollow core slabs and masonry.

Code	Rod	Size
RCS35	M8/M10	35mm Thread
RCS55	M8/M10	55mm Thread



### ► Satellite Fixing Kit

**Contains:**

4 - M8 x 50mm Coach Screws

4 - M10 x 50mm Wall Plugs

4 - M8 Washers

Code	Type
SATFIX	Satellite Fixing Kit



4 of Each

## Hollow Wall Fixings

### ► Zinc Alloy Driva BZP

**Material:** Zinc Alloy (Steel screw)

**Usage:** Light to Medium duty

**Application:** Fast simple installation without tool or drilling

**Substrate Applicable:** Plaster board, cavity walls, doors & ceilings.



Code	Size
MZDRIVA	38mm (RED)
SD	32mm (BLUE)

### ► Hollow Wall Anchor BZP (Brolly Anchor)

**Material:** Steel Bright Zinc Plated, heat resistant

**Usage:** Medium Duty

**Application:** Simple installation speeded up with tool

**Substrate Applicable:** Plaster board, fibre board, partitions and cavity walls.

**Tool (WAT)**

**Material:** Steel with plastic handles

**Usage:** For use with Brolly Anchors

**Application:** Provides controlled expansion



Code	Size
WAM537	M5 x 37
WAM643	M6 x 43
WAT	TOOL

### ► Spring Toggle BZP

**Material:** Steel Bright Zinc Plated, heat resistant

**Usage:** Medium to heavy duty (spreads load over wider area)

**Application:** Fast simple installation without tool

**Substrate Applicable:** Plaster & Fibre board, cavity walls, lath.




Code	Size
STM550	M5 x 50
STM575	M5 x 75
STM650	M6 x 50
STM675	M6 x 75

### ► Hammer Plug

**Material:** Steel

**Usage:** Hammer-in plug for plasterboard. No drilling needed, anchors itself when tightening the screw. Does not rotate on screwing.

**Application:** For medium fix cavity wall. For woodscrews 6g - 10g.



Code	Size
PBG	Hammer Plug (Screw Included) 4 x 40



Boxed in 200s

# ► Fixings and Fasteners

## Fire Retardants and Fixings

To meet BS7671 : 2015 Amendments

### ► Steel Spacer bar Saddle White Powder Coated

For plastic conduit, a steel spacer bar saddle with white powder coating for a professional looking finish.



Code	Size
SB20W	20mm
SB25W	25mm



### ► Fire clip for trunking Steel

Simply screw to wall, clip into plastic trunking and bend over arms.

For use with 25 x 16mm mini trunking.


In line with: BS5839-1

**Melting point:** 1000°C

**Finish:** Bright Zinc Plated



Code	Size
TFC	25mm
TFC38	38mm
TFC50	50mm



### ► Cable Tie Base Stainless Steel

**Material:** Stainless Steel A316 (A4) BS EN62275

**Operating Temperature:** -80 to 500°C

**Description:** To secure Cable Ties to masonry



Code	Size
CTBSS	6mm Hole



### ► Concrete Direct Screw Steel

These screws screw directly into masonry walls and are ideal to cover the fixings of above products without the use of plastic plugs.

Perfect for fitting new metal consumer units.



Code	Size
HM4845	4.8 x 45



### ► Ball Lock Cable Tie and Base Stainless Steel


**Tie Material:** Stainless Steel A316 (A4) BS EN 62275

**Operating Temperature:** -80 to 500°C

**Description:** Roller Ball Lock Type



Code	Size
CTSS200	4.6 x 200 Stainless Steel
CTSS300	4.6 x 300 Stainless Steel
CTSS360	4.6 x 360 Stainless Steel
CTSS520	7.9 x 520 Stainless Steel
CTSSB200	4.6 x 200 S/Steel Black Coated
CTSSB300	4.6 x 300 S/Steel Black Coated
CTSSB360	4.6 x 360 S/Steel Black Coated
CTSSB520	7.9 x 520 S/Steel Black Coated
CTSGUN	Cable Tie Gun

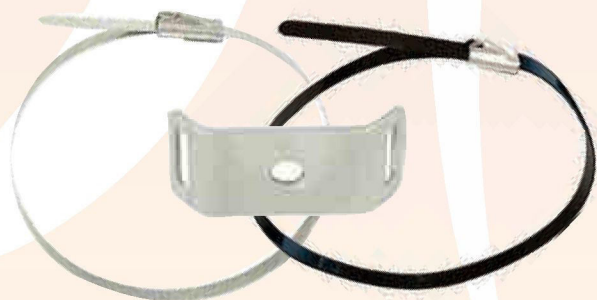



# ► Sealants & Chemicals

## Fire Retardants and Sealants

To meet BS7671 : 2015 Amendments

### ► Fire-Rated Flexible Filler

Intumescent acoustic acrylic sealant and adhesive with a decibel rating of 55 dBA. When subjected to heat the sealant swells (intumesces) to provide an inert barrier to smoke and flames. Conforms to BSEN 140 pt 3; BSEN 20140 & BS476 pt 20.

Code	Size
SDWF	310ml



### ► Fire-Rated Silicone Sealant

**Usage:** Maintains the integrity of fire walls when breached by conduits, pipes, etc. High movement and halogen free.  
**Standard:** 4 hours tested to ISO 834 & to BS 476, Part 22

Code	Size
SFIRE	310ml



### ► Fire Cement

**Usage:** A single component ready to use heat resistant sealant which cures to form a hard seal. It withstands temperatures of up to 1500°C. Conforms to BS 476: Part 20 - Warrington Fire Research Report C81770

Code	Size
SFC	310ml



### ► Fire-Rated Expanding Foam B1

**Usage:** A single component, moisture curing, self-expanding, ready to use polyurethane foam with propellants which are completely harmless to ozone layer. It has a fire rating of up to 235 minutes in certain configurations. High quality PU straw foam recommended for sealing applications where fire resistance is required. Conforms to Fire Class B1 DIN 4102

Code	Size
SFF750B1	750ml B1



### ► Socket Box Putty Pads Fire Protection

When electrical sockets and switches are installed in dry lining walls, the original fire rating of the wall is lost. To re-instate the fire rating fit Socket Box Fire Protection Pads.

**Acoustic Rating:** BS EN ISO 140-3:1995

Code	Size
FPE1	1 Gang External
FPE2	2 Gang External
FPI1	1 Gang Internal
FPI2	2 Gang Internal

Boxed in 20s



Internal Putty Pad

External Putty Pad



# ► Sealants & Chemicals

## Glues and Chemicals

### ► PVC-U Conduit Solvent Cement

**Usage:** Gap filling solvent cement for jointing PVC-U pipe and fittings, by creating a chemical bond

**Cure Time:** Set 10-15 mins, Full cure 48 hours, temperature 0-40 degrees C

**Standards:** to BS4346: Part 3

Code	Size
SCSC	250ml



### ► Super Glue

**Usage:** The high viscosity & strength means it can be used on porous & vertical surfaces

**Materials:** PVCu, rubbers, timbers & many plastics

**Cure Time:** Very quick and high initial grab

Code	Size
SSG	20G
SSG50	50G



### ► Gripbond / Saves Nails

**Usage:** Fast bonding adhesive with gap filling properties

**Cure Time:** 48 hours depending on thickness and temperature

**Info:** Solvent-free



Code	Size
SSN	310ml

### ► Expanding Foam

**Usage:** CFC-free propellant self-expanding, ready-to-use polyurethane foam

**Cure Time:** 90 minutes for a 30mm bead.

B1	Difficult to ignite
B3	Easily Ignited



Code	Size
SF750	750ml B3
SFF750B1	750ml B1

### ► Duogel Bi-Component Transparent Polymer Insulating Gel

#### Technical Specifications

- Pot life: 10 min
- Cross-linking time < 30 minutes
- Mixing ratio in weight 1:1
- Linear shrinkage after catalysis < 0.1
- Viscosity component A: 500 MPa
- Viscosity component B: 500 MPa
- Storage temperature from 5 °C to 30 °C
- Dielectric strength > 20 kV/mm
- Dielectric constant 2.85
- Volume resistivity 5.60x10<sup>13</sup> Ωcm
- Thermal conductivity < 0.2 W/mK

#### NORMS

- CEI EN 60439-1
- CEI EN 60529
- Compliant to EC directive 67/548/EEC

Code	Type
DGEL1000	2 x 500ml Gel and 1 x Mixing Jug



### ► Quickgel Mono Component Silicon Insulating

#### Technical Specifications

- Penetration degree 350 mm
- Linear shrinkage < 0.1%
- Hardness (Shore A): gel
- Dielectric strength > 20 kV/mm
- Operating temperature from -60 °C to 200 °C
- Installation temperature from -40 °C to 100 °C
- Short time stress temperature 250 °C

#### Technical Specifications

- Installation temperature from -40 °C to 100 °C
- Short time stress temperature 250 °C

#### Norms

- CEI EN 60439-1 ed.2000+V1 ed.2005
- CEI EN 60529+V1
- CEI EN 60695-2

Code	Size
QG300	Quick Silicon Gel





# ► Sealants & Chemicals

## Glues and Chemicals

### ► Metal Cutting Compound

**Usage:** Paste to ease metal work and increase tool life when cutting, drilling & tapping etc.  
**Contents:** Molybdenum disulphide, sulphur, phosphorus & petroleum  
**Temp Range:** Drop point 55°C



Code	Size
SMCC	450g

### ► Lightweight Filler

**Usage:** White paste for filling large holes and general repair both internally and externally  
**Materials:** Plaster, concrete, brick, wood & stone  
 Quick-drying, Mould and sound-resistant



Code	Size
SFIL	500ml
SFIL1	1Ltr

### ► Silicone Sealant

**Usage:** Sealing & Waterproofing in areas of high humidity.  
**Cure Time:** Tack < 30 minutes; full cure 3-6mm per day.



Code	Colour
SLMBL	Black
SLMC	Clear
SLMG	Grey
SLMW	White
SLMB	Brown

### ► Pro Multi-Use Silicone White

Advanced Modified Polymer Adhesive & Sealant.  
 Conforms to EN15651-1, F INT.

- For interior and exterior applications in all weather conditions.
- Remains permanently flexible.
- Can be over-painted with waterbased paints.
- Resistant to UV radiation, water (including seawater), mould and chlorine.
- Excellent adhesion to most surfaces (even moist surfaces). Wet on wet surface application.

**Application:** A universal, waterproof, construction adhesive and sealer.

Code	Size
SPROW	WHITE



### ► Flexible Filler

**Usage:** Good Adhesion to most materials, ideal for sealing joints and repairing cracks.  
**Cure Time:** 24 Hours depending on thickness and temperature (use above 5°C)

Code	Type	Size
SDW	Standard	310ml
SDWF	Fire-Retardant	310ml



# ► Sealants & Chemicals

## Aerosols

### ► Galvanising Spray 400ml

**Usage:** Corrosion prevention, excellent heat resistance, fast drying.

**Premium Contents:** Zinc Content 35% & aluminium to ensure a brighter finish

**Tempo Range:** 150 continuous to 400°C intermittent  
Boxed in 12s

Code	Size
SGALV	Premium
SGALVE	Standard



### ► Electrical Cleaner 400ml

**Usage:** Removes stains, coatings, oil, grease, dirt and most fluxes

**Contents:** A blend of propan-2-ol and butane propellant. No silicones

**Temp Range:** Designed for use at ambient temperatures  
Boxed in 12s

Code	Size
SEC	400ml



### ► Line Marker 750ml

**Usage:** Durable semi-permanent paint for hard and grass surfaces

**Contents:** Blend of pigments, resins, stabilizer, solvents & hydrocarbon propellant

**Temp Range:** Designed for use at ambient temperatures  
Boxed in 12s

Code	Size
LMB	Blue
LMBL	Black
LMG	Green
LMO	Orange
LMR	Red
LMW	White
LMY	Yellow



### ► Lubricants 400ml

**Usage:** Water displacement properties along with lubrication guarding against corrosion

**Contents:** Blend of naphtha, waxes, solvents & oils with hydrocarbon propellant

**Temp Range:** Designed for use at ambient temperatures  
Boxed in 12s

Code	Size
SMPS	Multi-Purpose (WD40)
SCCS	Cutting Spray



### ► Aerosol Circuit Freezer 400ml

**Usage:** Rapidly cools components to freezing point to help detect faults & shrink fit metal parts.

**Contents:** Liquified tetrafluoroethane and butane propellant

**Temp Range:** Designed for use at sub-zero temperatures  
Boxed in 12s

Code	Size
SCF	Circuit Freezer





# ► Industrial (M&E)

## Frames and Mounting Supports



### ► FX Foot Rubber

Code	Type
FX250	250mm
FX400	400mm
FX600	600mm
FX1000	1000mm

### ► Minifoot

Code	Size
FMFOOT	110mm x 110mm



### ► Large Foot

Code	Type
FMLFOOT	160mm x 160mm



### ► Dual Foot Set

Code	Type
FMTWIN	Twin mini with Channel



### ► H-Frame Kit **Strut not Included**

Code	Type
FXH305	305mm H Frame Kit

- 2 x 305 x 305mm Feet
- 2 x 90° Angle Brackets HDG
- 4 x M10 x 25 Hex Set Screws HDG
- 4 x M10 Flat Washers HDG
- 4 x M10 Channel Nuts HDG
- No Penetration of waterproof roof membrane
- Anti-vibration pads attached



# ► Cable Management

## Girder Fixings

### ► Cable Hanger / Cable Run Clip BZP

Code	Girder Size	Cable/Pipe Size	Erico Caddy	B-Line	Negurosu	Box Quantity
CR810	8-12mm	10-11	812SC1011	BXL1011	NEL1011	100
CR812	8-12mm	12-14	812SC1214	BXL1214	NEL1214	100
CR815	8-12mm	15-18	812SC1518	BXL1519	NEL1519	100
CR819	8-12mm	19-24	812SC1924	BXL2024	NEL2024	100
CR825	8-12mm	25-30	812SC2530	BXL2530	NEL2530	100
CR86	8-12mm	6-7	812SC67	BXL67	NEL67	100
CR87	8-12mm	8-9	812SC89	BXL89	NEL89	100
CR410	4-7mm	10-11	47SC1011	BXM1011	NEM1011	100
CR412	4-7mm	12-14	47SC1214	BXM1214	NEM1214	100
CR415	4-7mm	15-18	47SC1518	BXM1519	NEM1519	100
CR419	4-7mm	19-24	47SC1924	BXM2024	NEM2024	100
CR425	4-7mm	25-30	47SC2530	BXM2530	NEM2530	100
CR46	4-7mm	6-7	47SC67	BXM67	NEM67	100
CR47	4-7mm	8-9	47SC89	BXM89	NEM89	100
CR210	2-4mm	10-11	24SC1011	BXS1011	NES1011	100
CR212	2-4mm	12-14	24SC1214	BXS1214	NES1214	100
CR215	2-4mm	15-18	24SC1518	BXS1519	NES1519	100
CR219	2-4mm	19-24	24SC1924	BXS2024	NES2024	100
CR225	2-4mm	25-30	24SC2530	BXS2530	NES2530	100
CR26	2-4mm	6-7	24SC67	BXS67	NES67	100
CR27	2-4mm	8-9	24SC89	BXS89	NES89	100



### ► Cable Run Adapter BZP

Code	Girder Size	Cable/Pipe Size	Erico Caddy	B-Line	Negurosu	Box Quantity
CRA	12-20mm	NES Clips	SCA	BFA1215	NEA1215	100



### ► Purlin Clips BZP

Code	Girder Size	Cable/Pipe Size	Erico Caddy	B-Line	Negurosu	Box Quantity
VF1	1.5 - 5mm	6	J1	BF1 OR BF3	J1H-E	100
VF2	5 - 7mm	6	J2	BF2	J2H-E	100
ZP1	1.5 - 2.5mm	7	AF14	BF4	J3H	50
DCZ1	3mm		D1	BH21	ZHD2	75



### ► Conduit Clip BZP

Code	Cable/Pipe Size	Eric Caddy	B-Line	Negurosu	Box Quantity
SC750	20mm Conduit	K12	BW8	K19	50
SC1000	25mm Conduit	K8	BW12	K25	50
SC1250	32mm Conduit	K16	BW20	K31	50



# ► Cable Management

## Girder Fixings

### ► Girder Clip BZP

Code	Girder Size	Cable/Pipe Size	Erico Caddy	B-Line	Negurosu	Box Quantity
BC125	1.5 - 4mm		2H4	BE12	H4-E	100
BC250	4 - 10mm		4H24	BE24	H10-E	100
BC500	10 - 15mm		4H58	BE58	H15-E	100
BC750	15 - 20mm		4H912	BE912	H20-E	50




### ► Rod Hanger BZP

Code	Girder Size	Cable/Pipe Size	Erico Caddy	B-Line	Negurosu	Box Quantity
VF16MT	1.5 - 5mm	M6 Rod	M6TIJ1	BH4F1	J1H6Ti-E	100
VF18MT	1.5 - 5mm	M8 Rod	M8TIJ1	BMH8F1	J1H8Ti-E	100
VF110MT	1.5 - 5mm	M10 Rod	M10TIJ1	BMH10F1	J1H10Ti-E	100
VF26MT	5 - 7mm	M6 Rod	M6TIJ2	BH4F2	J2H6Ti-E	100
VF28MT	5 - 7mm	M8 Rod	M8TIJ2	BMH8F2	J2H8Ti-E	100
VF210MT	5 - 7mm	M10 Rod	M10TIJ2	BMH10F2	J2H10Ti-E	100



### ► Ceiling Clip BZP

Code		Stud Size	Erico Caddy	B-Line	Britclips	Box Qty
T2516	Ceiling Clips	M6 x 16	4G16M16	BMA41616	AC25	50



### ► Light Hanger (Witch's Hat) BZP

Code	Girder Size	Cable/Pipe Size	Erico Caddy	B-Line	Britclips	Box Quantity
MP1			DFF1	BH17	HSC1	50



### ► Dovetail Cable Hanger BZP

Code	Dove Tail Size	Hole	Erico Caddy	B-Line	Box Quantity
HOL2-SC	12-16mm	6mm	SCD12-16		50
HOL2-LC	17-22mm	6mm	SCD17-22		50



### ► Jack Chain BZP

**Standard:** Single Link  
DIN9021 Large Diameter  
**Steel:** No 10. (3mm Thick)  
**Max Work Load:** 7.5Kg  
**Finish:** Pre Galv  
**Packed:** 10m Boxes

Code	Size
JACK	10m






# ► Tools & Essentials Xiphos™

## SDS & Masonry Drilling

### Xiphos™

- Tungsten carbide tip conforming to DIN 8035.
- Heat treated for extra toughness.
- Suitable for all hammer drilling machines with SDS
- Plus Drive System
- Supplied on plastic hanging clip
- Double Flute for quicker dust extraction from hole and smoother drilling
- Applications - Suitable for drilling into hard materials such as concrete, rock, brick, stone and granite.

#### ► SDS Plus Chisel Bit



Code	Type
DC	DC SDS Gouge Channel Chisel
DC20	SDS Flat Chisel
DC40	SDS Flat Chisel



#### ► SDS Plus Drill Bit



**Standard:** Conforms to DIN8035

**Material:** Heat treated steel with tungsten carbide tip

**Finish:** Sand Blast

**Usage:** Concrete, rock, brick and granite.

Code	Size
DS4110	M4.0 x 110
DS4160	M4.0 x 160
DS5110	M5 x 110
DS5160	M5 x 160
DS55110	M5.5 x 110
DS55160	M5.5 x 160
DS6110	M6 x 110
DS6160	M6 x 160
DS65110	M6.5 x 110
DS65160	M6.5 x 160
DS65210	M6.5 x 210
DS7110	M7 x 110
DS7160	M7 x 160
DS7210	M7 x 210
DS8110	M8 x 110
DS8160	M8 x 160
DS8210	M8 x 210
DS8260	M8 x 260
DS8460	M8 x 460

DS10110	M10 x 110
DS10160	M10 x 160
DS10210	M10 x 210
DS10260	M10 x 260
DS10450	M10 x 450
DS10600	M10 x 600
DS12160	M12 x 160
DS12210	M12 x 210
DS12260	M12 x 260
DS12460	M12 x 460
DS12600	M12 x 600
DS121000	M12 x 1000
DS14160	M14 x 160
DS14210	M14 x 210
DS14260	M14 x 260
DS14450	M14 x 450
DS15160	M15 x 160
DS15260	M15 x 260
DS16160	M16 x 160
DS16210	M16 x 210

DS16250	M16 x 250
DS16460	M16 x 460
DS16600	M16 x 600
DS161000	M16 x 1000
DS18210	M18 x 210
DS18460	M18 x 460
DS20200	M20 x 200
DS20260	M20 x 260
DS20460	M20 x 460
DS20600	M20 x 600
DS201000	M20 x 1000
DS22260	M22 x 260
DS22450	M22 x 450
DS24450	M24 x 450
DS25250	M25 x 250
DS25450	M25 x 450
DS25600	M25 x 600
DS251000	M25 x 1000
DS26450	M26 x 450

#### ► Masonry Drill Bit

**Standard:** DIN 8039

**Material:** Hardened Steel tungsten carbide tip

**Finish:** Zinc Plated

**Description:** Concrete, rock, brick stone and granite



Code	Size
DM585	M5 x 85
DM5585	M5.5 x 85
DM55150	M5.5 x 150
DM6100	M6 x 100
DM6150	M6 x 150
DM65100	M6.5 x 100
DM65150	M6.5 x 150
DM7100	M7 x 100
DM7150	M7 x 150
DM8120	M8 x 120
DM8150	M8 x 150

DM8400	M8 x 400
DM10120	M10 x 120
DM10150	M10 x 150
DM10400	M10 x 400
DM12150	M12 x 150
DM12400	M12 x 400
DM14400	M14 x 400
DM16400	M16 x 400
DM20400	M20 x 400
DM22400	M22 x 400
DM25400	M25 x 400



# Tools & Essentials

**Xiphos™**

## Steel Drilling

### HSS Drill Bit Imperial

**Standard:** Conforms to BS328 & DIN 338

**Material:** High Speed Steel

**Finish:** Black

**Usage:** Metal, can be used with wood, plasterboard and plastics

Code	Size
DH116	1/16"
DH18	1/8"
DH532	5/32"
DH316	3/16"

DH14	1/4"
DH516	5/16"
DH38	3/8"
DH716	7/16"
DH12	1/2"



**Package Quantity:**  
M1 to M10 = 10 Pieces  
M10.5+ = 5 Pieces

### HSS Drill Bit Metric

**Standard:** Conforms to BS328 & DIN 338

**Material:** High Speed Steel

**Finish:** Black

**Usage:** Metal, can be used with wood, plasterboard and plastics

Code	Size
DHMON1	M1
DHM1.5	M1.5
DHM2	M2
DHM2.5	M2.5
DHM3	M3
DHM3.2	M3.2
DHM3.5	M3.5
DHM4	M4
DHM4.2	M4.2

DHM4.5	M4.5
DHM5	M5
DHM5.5	M5.5
DHM6	M6
DHM6.5	M6.5
DHM7	M7
DHM7.5	M7.5
DHM8	M8
DHM8.5	M8.5
DHM9	M9

DHM9.5	M9.5
DHM10	M10
DHM10.5	M10.5
DHM11	M11
DHM12	M12
DHM12.5	M12.5
DHM13	M13
DHM14	M14
DHM15	M15
DHM16	M16



### Ground HSS Drill Titanium Coated

**Standard:** Conforms to BS328 & DIN 338

**Material:** High Speed Steel

**Finish:** Titanium

**Usage:** Metal, can be used with wood, plasterboard and plastics



Code	Size
DTI3	3mm
DTI3.5	3.5mm
DTI4	4mm
DTI4.5	4.5mm
DTI5	5mm
DTI5.5	5.5mm
DTI6	6mm

DTI6.5	6.5mm
DTI7	7mm
DTI8	8mm
DTI9	9mm
DTI9.5	9.5mm
DTI10	10mm
DTI10.5	10.5mm
DTI12	12mm



**Package Quantity:**  
3mm to 10mm = 10 Pieces  
10.5mm+ = 5 Pieces

### Hand Taps

**Standard:** ISO724

**Material:** High Speed Steel

**Usage:** Number 2 taper cut to thread thin metal

Code	Size
DHT35	3.5mm
DHT40	4mm
DHT50	5mm
DHT60	6mm
DHT80	8mm
DHT10	10mm
DHT12	12mm
DHTW	Wrench



### Step Drill

Code	Size
DCS630	6-30mm

**Material:** High Speed Steel, with ground diameters

**Usage:** Cutting accurate measured size holes in thin sheet materials



### Cone Cutter

Code	Size
DCC620	6-20mm
DCC1630	16-30mm

**Material:** High Speed Steel, with ground diameters

**Usage:** Cutting variable holes in thin sheet materials



### 19-Piece HSS Drill Bit Set

Code	Type
D19PC	Plastic Box

**Standard:** Conforms to BS328 & DIN 338

**Package:** Plastic Box

**Drills:** Bright Finish

**Size:** 1mm to 10mm in 0.5mm increments



# ► Tools & Essentials Xiphos™

## Wood Drills

### ► Auger Wood Bit Hex Shank

**Material:** Carbon Steel, Ground & Sharpened

**Usage:** Precision drilling for wood and plasterboard

**Drill:** Hex Shank

Code	Size
DA6	6.0 x 235
DA8	8.0 x 235
DA10	10 x 235
DA12	12.0 x 235
DA16	16.0 x 235
DA20	20.0 x 235
DA20400	20.0 x 400
DA22	22.0 x 235
DA25	25.0 x 235
DA25400	25.0 x 400
DA32	32.0 x 235



### ► Auger Wood Bit SDS Shank

**Material:** Carbon Steel, Ground & Sharpened

**Usage:** Precision drilling for wood and plasterboard

**Drill:** SDS Electric Drill (Not Hammer action)

Code	Size
DA20SDS	20 x 235
DA25SDS	25 x 235



### ► Keyless Chuck & SDS Adapter

**Usage:** To convert an SDS drill to keyless chuck (fast and easy)

Code	Size
CHUCK	Chuck and Adapter



### ► Flat Wood Bit

**Length:** 150mm

**Material:** Heat treated Carbon Steel with precision cut edges.

**Usage:** Rapid Drilling in all types of wood

Code	Size
DF10	10mm
DF13	13mm
DF16	16mm
DF20	20mm
DF22	22mm
DF25	25mm
DF32	32mm
DF38	38mm



### ► Heavy Duty Flat Wood Bit

**Length:** 150mm

**Material:** Heat treated Carbon Steel with precision cut edges.

**Usage:** Rapid Drilling in all types of wood

Code	Size
DF20H	20mm
DF25H	25mm



### ► Extension Shank

Code	Size
DHE	300mm



## Special Offer Xiphos Stand

# FREE

Counter stand worth £65 for orders over £300 on Xiphos products



Special Offer - On orders of over £300+ of any mix of Xiphos drill bits, taps, step drills, wood bits, chuck adaptors or holesaws.

This is a deligo stand-out offer worth £65!



# ► Tools & Essentials Xiphos™

## Holesaws, Hacksaws & Jigsaws

# Xiphos™



### ► Holesaw Arbour Pilot Drill

Code	Size
HPIL	For SS1
HPILONG	For SS2



### ► Holesaw Arbour Hex

**SS1 Usage:** Suitable for use with bi-metal holesaws, sizes 14-30mm  
**SS2 Usage:** Suitable for use with bi-metal holesaws, sizes 32-152mm  
**Chuck:** SS1 - Fits 9.5mm (3/8") chuck, SS2 Fits 13mm (1/2") chuck  
 Arbour and pilot drill supplied completed and ready for use.

Code	Size
SS1	14-30mm
SS2	32-152mm



### ► Holesaw Arbour SDS

**SS1 Usage:** Suitable for use with bi-metal holesaws, sizes 14-30mm  
**SS2 Usage:** Suitable for use with bi-metal holesaws, sizes 32-152mm  
**Chuck:** SDS Drill fitting  
 Arbour and pilot drill supplied complete and ready for use.

Code	Size
SS1SDS	14-30mm
SS2SDS	32-152mm



### ► Bi-Metal Hacksaw Blade

Code	Size
18TPI	12" x 18TPI
24TPI	12" x 24TPI
32TPI	12" x 32TPI
JUNIOR	6" Junior

**Material:** Bi-Metal Technology  
**Usage:** Flexible almost unbreakable blade  
**18TPI** - Rough Cut ideal for fast cut & thick steels.  
**24TPI** - General Purpose.  
**32TPI** - cutting thin sheet metals and sections.

Use cutting compound to prolong blade life (SMCC and SCSS)



### ► Xiphos Holesaw

**Steel:** HSS, BI Metal

**Finish:** Black

**Usage:** Steel, wood and plastics

Code	Size
HS16	16mm
HS20	20mm
HS22	22mm
HS25	25mm
HS27	27mm
HS32	32mm
HS38	38mm
HS40	40mm
HS44	44mm
HS51	51mm
HS54	54mm
HS60	60mm
HS64	64mm
HS65	65mm
HS67	67mm
HS70	70mm
HS73	73mm
HS76	76mm
HS79	79mm
HS83	83mm
HS86	86mm
HS89	89mm
HS92	92mm
HS95	95mm
HS102	102mm
HS105	105mm
HS111	111mm
HS127	127mm
HS152	152mm

Interchangeable with all leading brands



### ► Jigsaw Blade

**Material:** HSS Type: T-Type shank jigsaw blades suitable for use in AEG, Bosch, ELU, Hitachi and most other makes.

**Usage:** Cutting Shapes & Curves in a wide range of materials.

Code	Pitch	Size
T118A	1.2mm	Steel & Aluminium
T101B	2.5mm	Soft & Hard Wood
T101BR	4.0mm	Soft & Hard Wood
T101D	2.5mm	Laminate chipboard
T111C	4.0mm	Soft & Hard Wood
T144D	3.0mm	Soft & Hard Wood, Plastic



# ► Wiring Accessories

## Lighting Accessories

### ► Connector Box with Fittings

17th Edition

**Material:** Plastic

**Size:** 90mm x 50mm x 25mm

**Usage:** Junction box for fixed wiring & inline connector when used with cord grips supplied

Code	Size
CHOC	50 x 90mm



### ► Strip Connector

**Standard:** Conforms to BS EN 60998-1

**Material:** Polyethylene with Brass insert

**Finish:** Natural Colour

Code	Size
CS3	3 Amp
CS5	5 Amp
CS15	15 Amp
CS30	30 Amp
CS60	60 Amp



### ► Ceiling Clip BZP



Code	Stud Size	Erico Caddy	B-Line	Brit Clips	Box Quantity
T2516	M6 x 16	4G16M16	BMA41616	AC25	50

### ► Light Hanger (Witch's Hat)



Code	Girder Size	Erico Caddy	B-Line	Brit Clips	Box Quantity
MP1		DFF1	BH17	HSC1	50

### ► Lever Splicing Connectors

Available in 2, 3 or 5 conducting levered terminal blocks

**Usage:** Low Voltage lighting systems, HVAC control circuits, junction boxes

**Advantage:** Re-usable, can accept stranded and solid & flexible wires



Code	Type
W222-2	2 Pole Lever Connector
W222-3	3 Pole Lever Connector
W222-5	5 Pole Lever Connector

Unit	Pack Quantity
Pack	50
Pack	50
Pack	40



### ► Push Wire Connectors

Available in 2, 3\*, 4, 6 and 8 pole (\*Used with solid & stranded wire 1.5 – 6mm)

**Usage:** Junction box, low voltage lighting, consumer units & power distribution

**Advantage:** Re-usable, fast securing, transparent to see conductor is secure.  
\*32 Amp

Code	Type
W773-2	2 Conductor Connector
W773-3	3 Conductor Connector
W773-4	4 Conductor Connector
W773-6	6 Conductor Connector
W773-8	8 Conductor Connector

Unit	Pack Quantity
Pack	100
Pack	50
Pack	100
Pack	50
Pack	50




# ► Wiring Accessories

## Wiring Accessories

### ► Telescopic Box Mounting Bracket

- Easy and fast to install
- Can be used on metal or traditional wood studs
- Completely adjustable - will fit a range of stud spacings and will easily allow fitting of 47mm Box up to a total depth of 54mm.
- Pre-punched screw holes for easy box installation.
- Bar is marked with a scale for accurate stud spacing

Code	Size
TWB16	11-18" (280mm - 450mm)
TWB24	15-26" (380mm - 660mm)

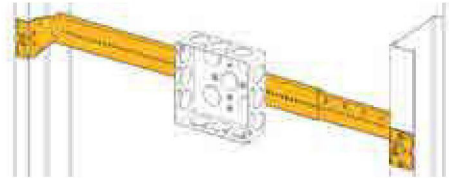

### ► Spiral Wrap

**Material:** Polyethylene  
**Temperature Range:** -60 to 90°C  
**Length:** 25m



Code	Size
SW6	4-50mm
SW12	9-65mm
SW22	20-130mm

## Grommets

### ► Open Grommet

**Material:** Black PVC  
**Usage:** protect cables from steel knockouts in switch & adaptable boxes  
 Bagged in 100s



Code	Size	Bag Quantity
CG16	16mm	100
CG20	20mm	100
CG25	25mm	100
CG32	32mm	50
CG38	38mm	25
CG50	50mm	25

### ► Open Super Grommet Quick Fit

**Material:** Black PVC  
**Usage:** protect cables from steel knockouts in switch & adaptable boxes  
 Bagged in 100s



Code	Size	Bag Quantity
CG20S	20mm	100
CG25S	25mm	100
CG32S	32mm	50

### ► Blank Grommet

**Material:** Black PVC  
**Usage:** protect cables from steel knockouts in switch & adaptable boxes  
 Bagged in 100s



Code	Size	Bag Quantity
CGB16	16mm	100
CGB20	20mm	100
CGB25	25mm	100
CGB32	32mm	50
CGB38	38mm	25
CGB50	50mm	25

### ► Grommet Strip

**Material:** PE Natural  
**Usage:** Provides a smooth edging to cut panels



Code	Size
GS2	1.2-1.6mm (10m)
GS3	1.5-2.0mm (10m)

# ► Circuit Protection

## Fuses

### ► Plug Top Fuse BS1362

Code	Rated Current
FONE	1 Amp
F2	2 Amp
F3	3 Amp
F5	5 Amp
F7	7 Amp
F10	10 Amp
F13	13 Amp



### ► Fuse Wire

**Material:** Copper Wire  
**Finish:** Tinned

Code	Type
FWC	Fuse Wire Carded



### ► Domestic Consumer Unit Fuse BS1361

Code	Lawson	Rated Current	Size	Colour
FC55	LA5	5 Amp	6.3 x 2.3	White
FC1515	LC15	15 Amp	26 x 10.3	Blue
FC1520	LC20	20 Amp	26 x 10.3	Yellow
FC3030	LD30	30 Amp	29 x 12.7	Red
FC4545	LK45	45 Amp	35 x 16.7	Green



### ► House Service Cut-Out Fuse BS1361

Code	Lawson	Rated Current	Size
FHS60	ME60	60 Amp	22.2mm
FHS80	ME80	80 Amp	22.2mm
FHS100	ME100	100 Amp	22.2mm
FHSL80	MF80	80 Amp	30.16mm
FHSL100	MF100	100 Amp	30.16mm



### ► Assorted Glass Fuse Kit

Assorted Glass Fuses (20mm and 30mm)  
**Contains:** 200 Fuses

Code	Type
GFK	Glass Fuse Kit





# ► Circuit Protection

## Fuses

### ► A1 Type HRC Fuse Offset Bolted

Standard: BS88& IEC269, Class gG/Q1  
Interrupting Value: 80Ka @550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FNIT2	2 Amp	44mm	NITD2	NIT2	2SA2	2F21	NIT2
FNIT4	4 Amp	44mm	NITD4	NIT4	4SA2	4F21	NIT4
FNIT6	6 Amp	44mm	NITD6	NIT6	6SA2	6F21	NIT6
FNIT10	10 Amp	44mm	NITD10	NIT10	10SA2	10F21	NIT10
FNIT16	16 Amp	44mm	NITD16	NIT16	16SA2	16F21	NIT16
FNIT20	20 Amp	44mm	NITD20	NIT20	20SA2	20F21	NIT20
FNIT25	25 Amp	44mm	NIT25	NIT25	25SA2	25F21	NIT25
FNIT32	32 Amp	44mm	NIT32	NIT32	32SA2	32F21	NIT32



### ► A2 Type HRC Fuse Offset Bolted

Standard: BS88& IEC269, Class gG/Q1  
Interrupting Value: 80Ka @550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FAA6	6 Amp	73mm	AAO6	TIA6	6SB3	6H07	TIA6
FAA10	10 Amp	73mm	AAO10	TIA10	10SB3	1H07	TIA10
FAA16	16 Amp	73mm	AAO16	TIA16	16SB3	16H07	TIA16
FAA20	20 Amp	73mm	AAO20	TIA20	20SB3	20H07	TIA20
FAA25	25 Amp	73mm	AAO25	TIA25	25SB3	25H07	TIA25
FAA32	32 Amp	73mm	AAO32	TIA32	32SB3	32H07	TIA32



### ► A3 Type HRC Fuse Offset Bolted

Standard: BS88& IEC269, Class gG/Q1  
Interrupting Value: 80Ka @550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FBA40	40 Amp	73mm	BAO40	TIS40	40SB4	40K07	TIS40
FBA50	50 Amp	73mm	BAO50	TIS50	50SB4	50K07	TIS50
FBA63	63 Amp	73mm	BAO63	TIS63	63SB4	63K07	TIS63



### ► Street Lighting Fuse Offset Bolted

Standard: BS88 & IEC 269, Class gG/Q1  
Interrupting Value: 80Ka @ 550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FSTD2	2 Amp	35mm	STD2			2D19L	LST2
FSTD4	4 Amp	35mm	STD4			4D19L	LST4
FSTD6	6 Amp	35mm	STD6			6D19L	LST6
FSTD10	10 Amp	35mm	STD10			10D19L	LST10
FSTD16	16 Amp	35mm	STD16			16D19L	LST16
FSTD20	20 Amp	35mm	STD20			20D19L	LST20



# ► Circuit Protection

## Fuses

### ► A1 Type HRC Fuse **Offset Bolted** **Standard:** BS88 & IEC 269, Class gG/Q1 **Interrupting Value:** 80Ka @ 550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FCE80	80 Amp	94mm	CEO80	TCP80	80SD5	80L14	TCP80
FCE100	100 Amp	94mm	CEO100	TCP100	100SD5	100L14	TCP100
FCE160	160 Amp	94mm	CEO160	TCP160	160SD5	160L14	TCP160



### ► A4 Type HRC Fuse **Offset Bolted** **Standard:** BS88 & IEC 269, Class gG/Q1 **Interrupting Value:** 80Ka @ 550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FDEO125	125 Amp	94mm	CEO100M125	TFP125	125SD6	125M14	TFP125
FDEO160	160 Amp	94mm	CEO100M160	TFP160	160SD6	160M14	TFP160
FDEO200	200 Amp	94mm	CEO100M200	TFP200	200SD6	200M14	TFP200



### ► B1 Type HRC Fuse **Centre Bolted** **Standard:** BS88 & IEC 269, Class gG/Q1 **Interrupting Value:** 80Ka @ 550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FCD80	80 Amp	111mm	CD80	TC80	80SF5	80L09	TC80
FCD100	100 Amp	111mm	CD100	TC100	100SF5	100L09	TC100



### ► B2 Type HRC Fuse **Centre Bolted** **Standard:** BS88 & IEC 269, Class gG/Q1 **Interrupting Value:** 80Ka @ 550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FDD125	125 Amp	111mm	DD125	TF125	125SF6	125M09	TF125
FDD160	160 Amp	111mm	DD1605	TF160	160SF6	160M09	TF160
FDD200	200 Amp	111mm	DD200	TF200	200SF6	200M09	TF200



### ► F1 Type HRC Fuse **Offset Bladed Tag** **Standard:** BS88 & IEC 269, Class gG/Q1 **Interrupting Value:** 80Ka @ 550V

Code	Rated Current	Fixing Centre	Bussman	GEC	MEM	Brush	Lawson
FNS2	2 Amp	60.3mm	NSD2	NS2	2SN2	2F06	NS2
FNS4	4 Amp	60.3mm	NSD4	NS4	4SN2	4F06	NS4
FNS6	6 Amp	60.3mm	NSD6	NS6	6SN2	6F06	NS6
FNS10	10 Amp	60.3mm	NSD10	NS10	10SN2	10F06	NS10
FNS16	16 Amp	60.3mm	NSD16	NS16	16SN2	16F06	NS16
FNS20	20 Amp	60.3mm	NSD20	NSD20	20SN2	20F06	NSD20
FNS25	25 Amp	60.3mm	NSD25	NSD25	25SN2	25F06	NSD25
FNS32	32 Amp	60.3mm	NSD32	NSD32	32SN2	32F06	NSD32

